Wi-Fi Network Report



Name: **FENF_COMPLETO**

Location:


Responsible Person:

Project description

Wi-Fi Network Report

2026 02 26 - FEES N0 Planta Basamento 2025

Survey routes and Access Points for 2026 02 26 - FEES N0 Planta Basamento 2025

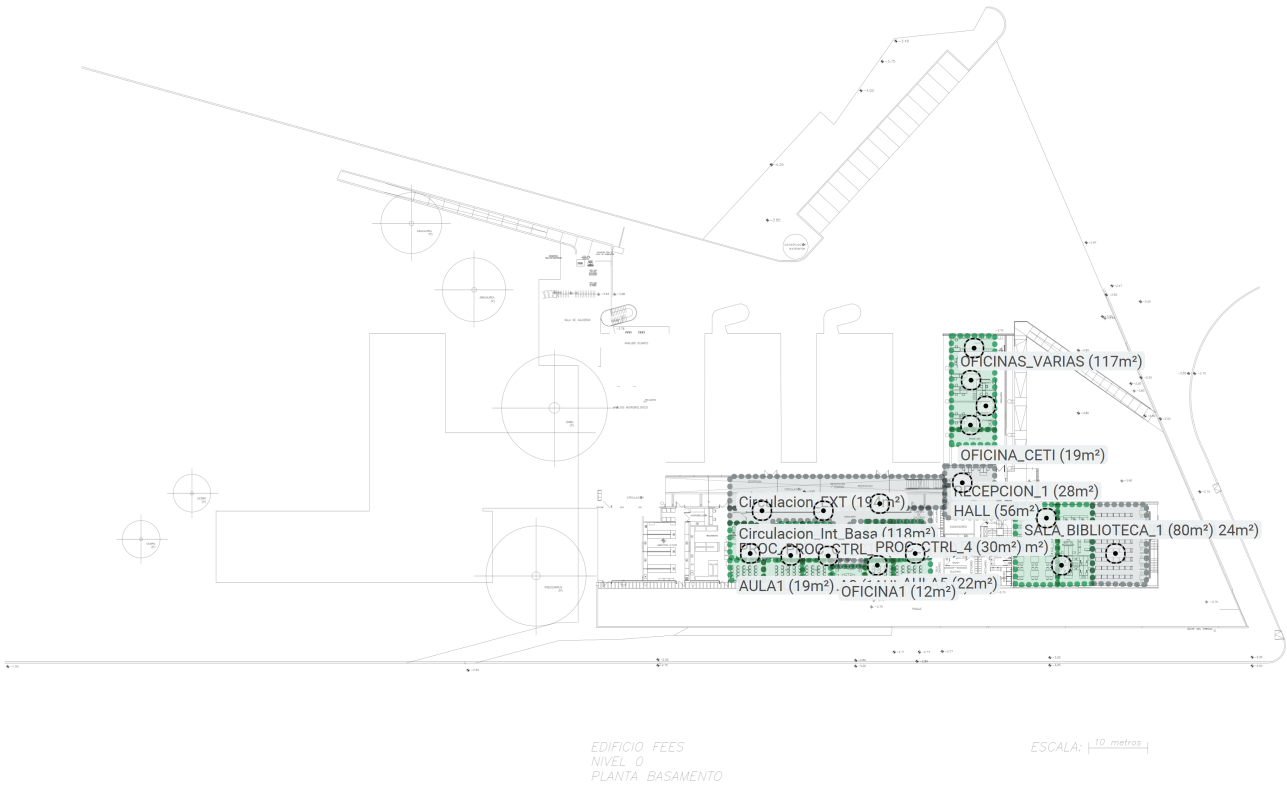

View as / Project Offset:	Mobile Device

ANAQUELES_1 (124 m²)

Coverage Requirement: **Basic Connectivity**

2.4 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**3 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
5 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
6 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
Capacity Requirement	**5** Generic Smartphone [Web Email (2 Mbps)]	
	Total: 5 (10 Mbits/s)	
Notes		

AULA1 (19 m²)

Coverage Requirement: **Ekahau Best Practices**

2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**20**	Generic Laptop [Web Email (2 Mbps)]
	20	Generic Smartphone [Web Email (2 Mbps)]
	1	Generic Laptop [Streaming, Video]
	Total: 41 (83 Mbits/s)	
Notes		

AULA2 (23 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**

5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**20**	Generic Laptop [Web Email (2 Mbps)]
	20	Generic Smartphone [Web Email (2 Mbps)]
	1	Generic Laptop [Streaming, Video]
	Total: 41 (83 Mbits/s)	
Notes		

AULA3 (16 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**

6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement		
	20	Generic Laptop [Web Email (2 Mbps)]
	20	Generic Smartphone [Web Email (2 Mbps)]
	1	Generic Laptop [Streaming, Video]
	Total: 41 (83 Mbits/s)	
Notes		

AULA4 (15 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**

Capacity Requirement	**20** Generic Laptop [Web Email (2 Mbps)] **20** Generic Smartphone [Web Email (2 Mbps)] **1** Generic Laptop [Streaming, Video] **Total: 41 (83 Mbits/s)**
Notes	

AULA5 (22 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**20** Generic Laptop [Web Email (2 Mbps)] **20** Generic Smartphone [Web Email (2 Mbps)] **1** Generic Laptop [Streaming, Video] **Total: 41 (83 Mbits/s)**	
Notes		

BIBLIOTECA_1 (80 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**15** Generic Laptop [Web Email (2 Mbps)]	
	15 Generic Smartphone [Web Email (2 Mbps)]	
	Total: 30 (60 Mbits/s)	
Notes		

Circulacion_EXT (194 m²)

Coverage Requirement: **Basic Connectivity**		
2.4 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**3 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**

5 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
6 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
Capacity Requirement	**10** Generic Smartphone [Background Sync] **Total: 10 (5 Mbits/s)**	
Notes		

Circulacion_Int_2 (6 m²)

Coverage Requirement: **Basic Connectivity**		
2.4 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**3 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**

5 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
6 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
Capacity Requirement	**1**	Generic Laptop [Web Email (2 Mbps)]
	1	Generic Smartphone [Web Email (2 Mbps)]
	Total: 2 (4 Mbits/s)	
Notes		

Circulacion_Int_Basa (118 m²)

Coverage Requirement: **Basic Connectivity**		
2.4 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**3 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**

5 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
6 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
Capacity Requirement	**25** Generic Smartphone [Web Email (2 Mbps)]	
	Total: 25 (50 Mbits/s)	
Notes		

HALL (56 m²)

Coverage Requirement: **Basic Connectivity**		
2.4 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**3 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**

5 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
6 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
Capacity Requirement	**10** Generic Smartphone [Web Email (2 Mbps)]	
	Total: 10 (20 Mbits/s)	
Notes		

OFICINA1 (12 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**

6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement		
	6	Generic Laptop [Web Email (2 Mbps)]
	6	Generic Smartphone [Web Email (2 Mbps)]
	Total: 12 (24 Mbits/s)	
Notes		

OFICINAS_VARIAS (117 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**

Capacity Requirement	**20** Generic Laptop [Web Email (2 Mbps)] **20** Generic Smartphone [Web Email (2 Mbps)] **Total: 40 (80 Mbits/s)**
Notes	

OFICINA_CETI (19 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**4** Generic Laptop [Web Email (2 Mbps)] **4** Generic Smartphone [Web Email (2 Mbps)] **Total: 8 (16 Mbits/s)**	
Notes		

PROC_CTRL_1 (26 m²)

Coverage Requirement: **Ekahau Best Practices**

2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**5**	Generic Laptop [Web Email (2 Mbps)]
	5	Generic Smartphone [Web Email (2 Mbps)]
	1	Generic Laptop [Streaming, Video]
	Total: 11 (23 Mbits/s)	
Notes		

PROC_CTRL_2 (27 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**

5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**5**	Generic Laptop [Web Email (2 Mbps)]
	5	Generic Smartphone [Web Email (2 Mbps)]
	1	Generic Laptop [Streaming, Video]
	Total: 11 (23 Mbits/s)	
Notes		

PROC_CTRL_3 (29 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**

6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement		
	5	Generic Laptop [Web Email (2 Mbps)]
	5	Generic Smartphone [Web Email (2 Mbps)]
	1	Generic Laptop [Streaming, Video]
	Total: 11 (23 Mbits/s)	
Notes		

PROC_CTRL_4 (30 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**

Capacity Requirement	**5** Generic Laptop [Web Email (2 Mbps)] **5** Generic Smartphone [Web Email (2 Mbps)] **1** Generic Laptop [Streaming, Video] **Total: 11 (23 Mbits/s)**
Notes	

PROC_CTRL_5 (33 m²)

Coverage Requirement: **Ekahau Best Practices**		
2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**5** Generic Laptop [Web Email (2 Mbps)] **5** Generic Smartphone [Web Email (2 Mbps)] **1** Generic Laptop [Streaming, Video] **Total: 11 (23 Mbits/s)**	
Notes		

RECEPCION_1 (28 m²)

Coverage Requirement: **Basic Connectivity**		
2.4 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**3 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
5 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
	Round Trip Time (RTT) Max	**500 ms**
6 GHz	Signal Strength Min	**-75.0 dBm**
	Secondary Signal Strength Min	**-80.0 dBm**
	Signal-to-Noise Ratio Min	**16.0 dB**
	Data Rate Min	**11 Mbps**
	Channel Interference Max	**1 at min. -80.0 dBm**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Round Trip Time (RTT) Max	**500 ms**
	Packet Loss Max	**10.0 %**
Capacity Requirement	**5** Generic Smartphone [Web Email (2 Mbps)]	
	Total: 5 (10 Mbits/s)	
Notes		


SALA_LECTURA_1 (97 m²)

Coverage Requirement: **Ekahau Best Practices**

2.4 GHz	Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**2 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
5 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-67.0 dBm**
	Signal-to-Noise Ratio Min	**25.0 dB**
	Data Rate Min	**24 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**0.0 %**
6 GHz	Signal Strength Min	**-67.0 dBm**
	Secondary Signal Strength Min	**-75.0 dBm**
	Signal-to-Noise Ratio Min	**20.0 dB**
	Data Rate Min	**20 Mbps**
	Channel Interference Max	**1 at min. -85.0 dBm**
	Round Trip Time (RTT) Max	**200 ms**
	Packet Loss Max	**2.0 %**
Capacity Requirement	**50**	Generic Laptop [Web Email (2 Mbps)]
	50	Generic Smartphone [Web Email (2 Mbps)]
	Total: 100 (200 Mbits/s)	
Notes		

Signal Strength for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Signal Strength - sometimes called coverage - is the most basic requirement for a wireless network. As a general guideline, low signal strength means unreliable connections, and low data throughput.

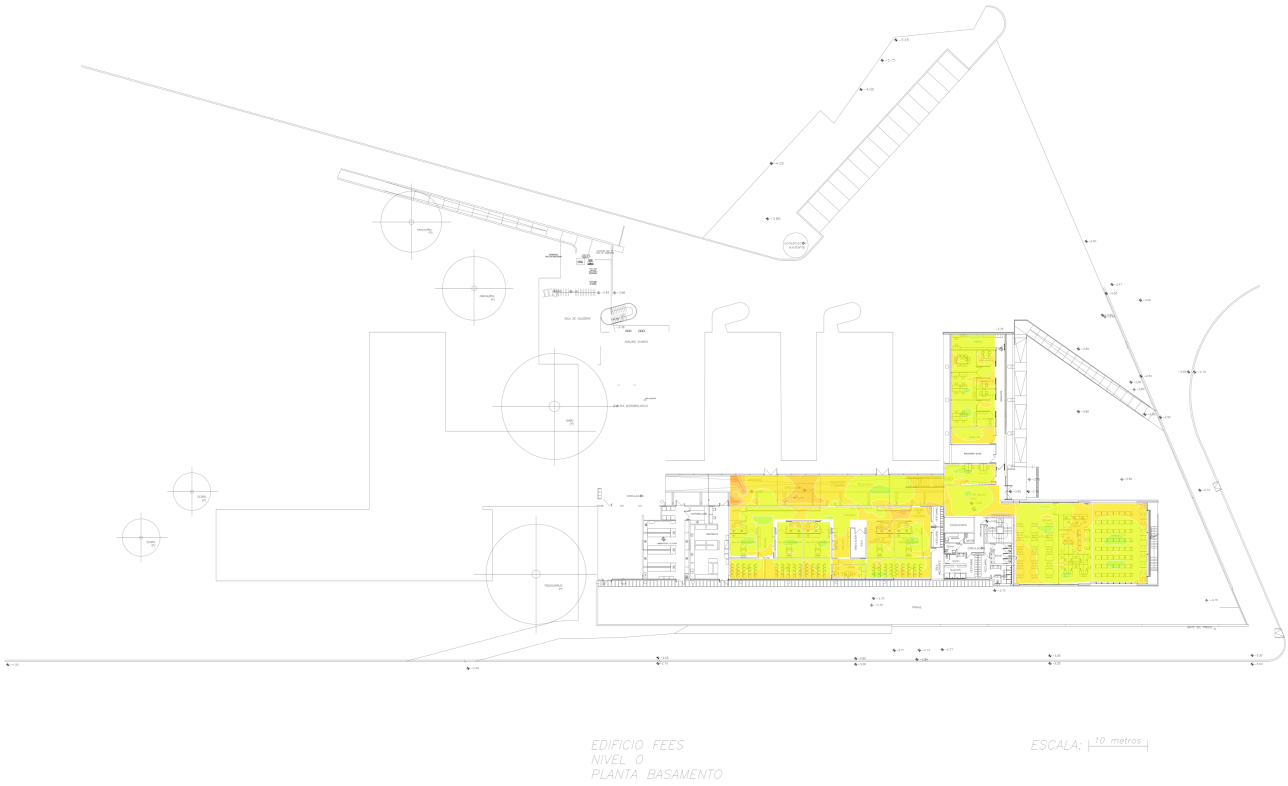



Signal Strength for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Signal Strength - sometimes called coverage - is the most basic requirement for a wireless network. As a general guideline, low signal strength means unreliable connections, and low data throughput.

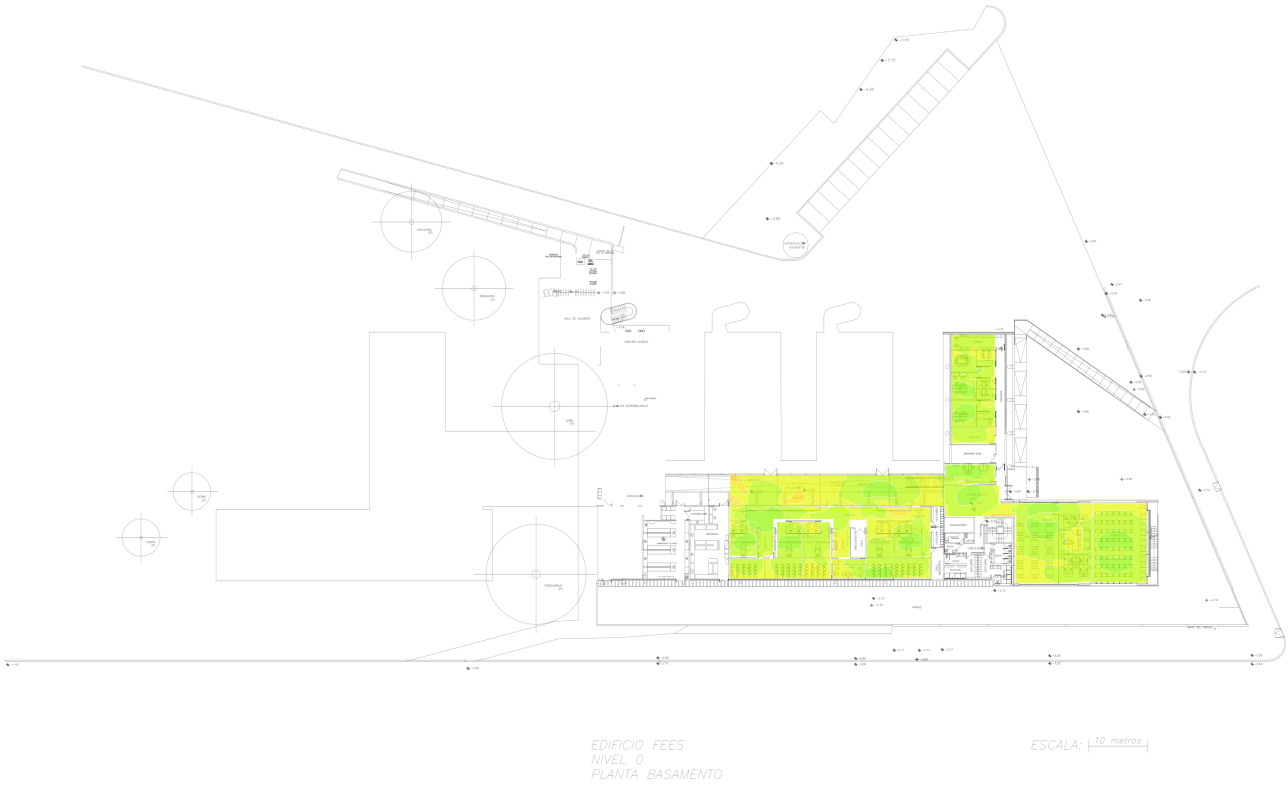



Secondary Signal Strength for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Secondary Signal Strength shows the second strongest RSSI on any given location on the map. This heatmap helps to ensure smooth roaming for clients and quality of service for certain latency-sensitive applications, such as VoIP calls.

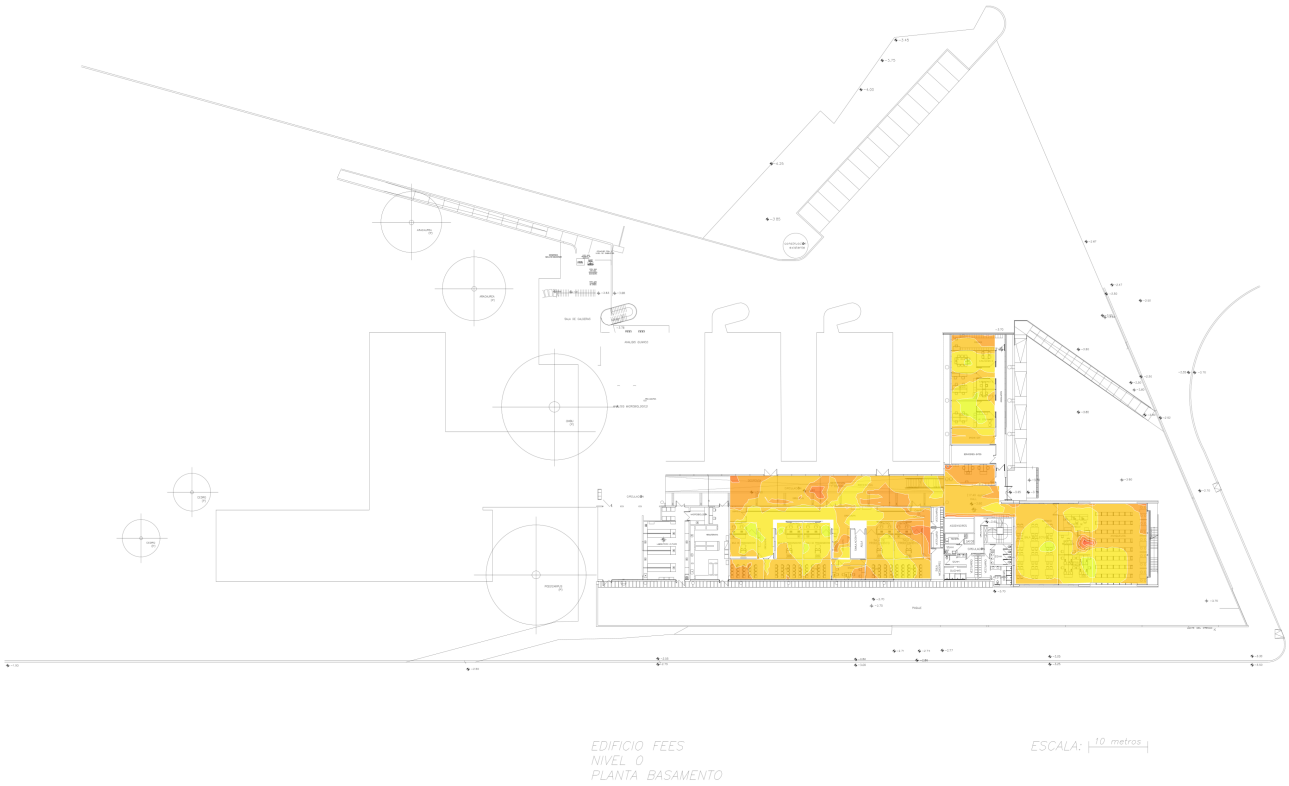



Secondary Signal Strength for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Secondary Signal Strength shows the second strongest RSSI on any given location on the map. This heatmap helps to ensure smooth roaming for clients and quality of service for certain latency-sensitive applications, such as VoIP calls.

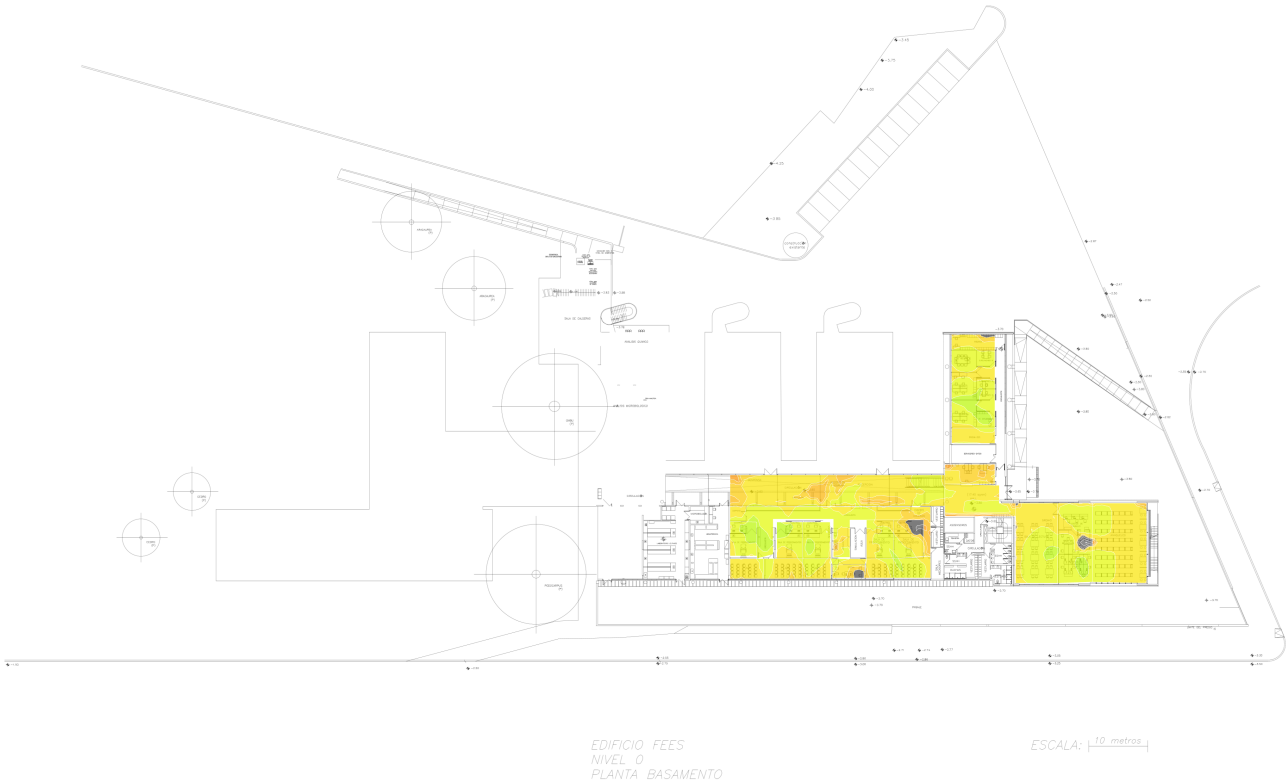



Tertiary Signal Strength for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Tertiary Signal Strength is used to display the third strongest RSSI on any given point of the map. Tertiary Signal is mostly used to ensure sufficient quality of service for certain specialized services, such as Real-time Location (RTLS) applications.

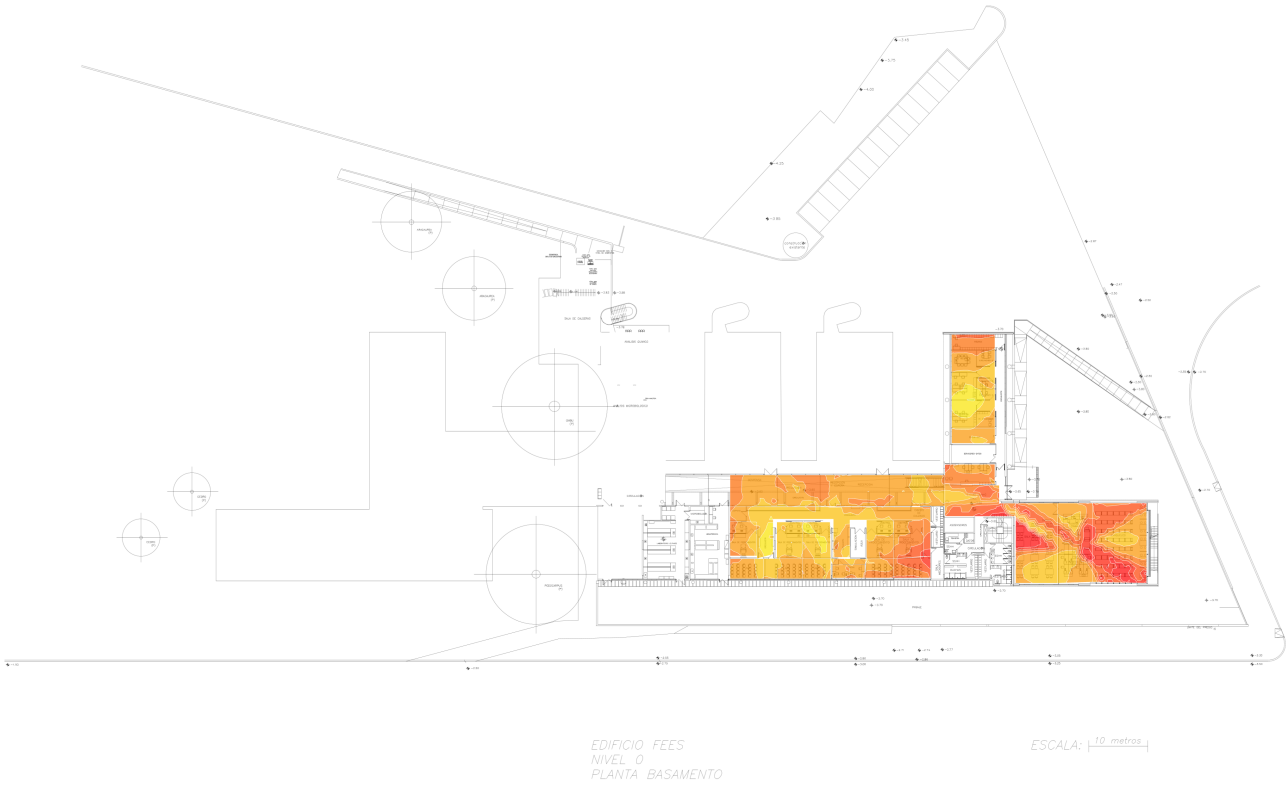



Tertiary Signal Strength for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Tertiary Signal Strength is used to display the third strongest RSSI on any given point of the map. Tertiary Signal is mostly used to ensure sufficient quality of service for certain specialized services, such as Real-time Location (RTLS) applications.

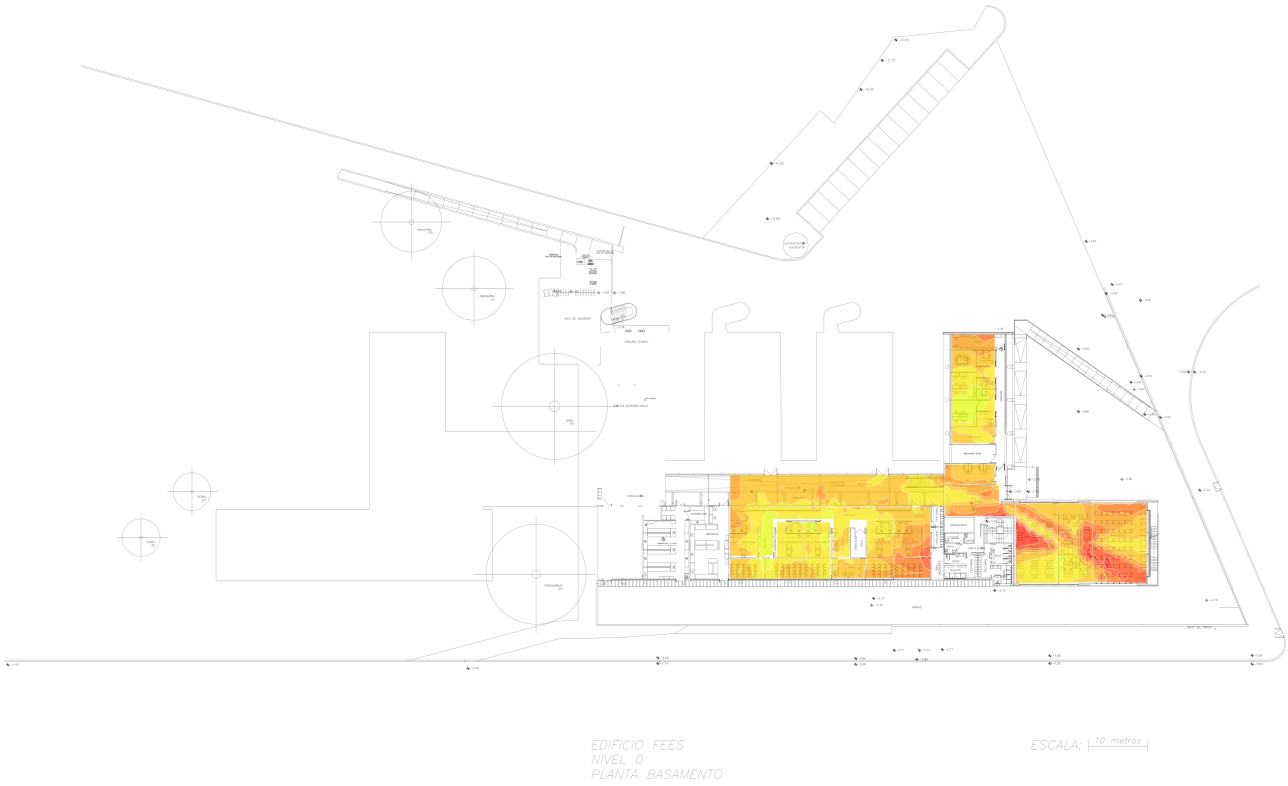




Signal To Noise Ratio (SNR) for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Signal-To-Noise Ratio indicates how much the signal strength is stronger than the noise (co-channel interference). Signal must be stronger than noise (SNR greater than zero) for data transfer to be possible. If the signal is only barely stronger than noise, you may encounter occasional connection drop-offs.

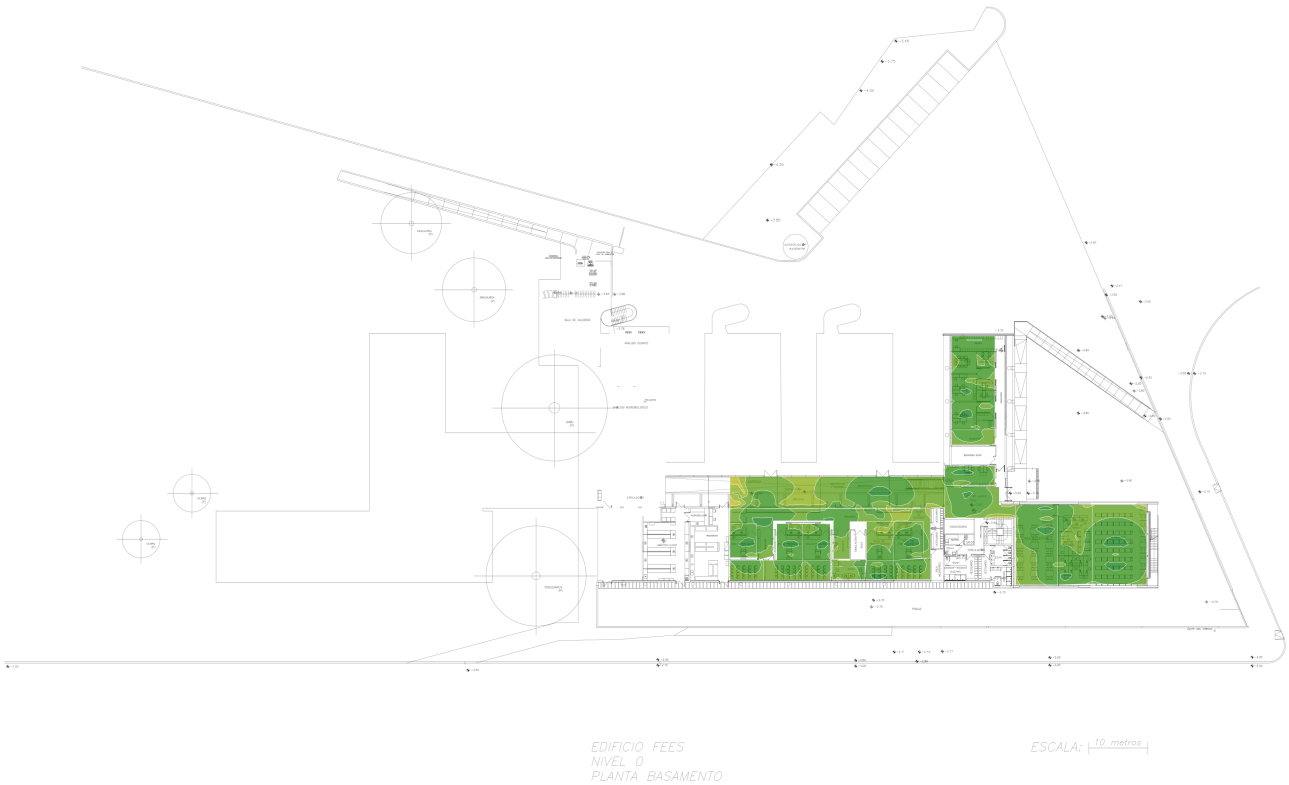



Signal To Noise Ratio (SNR) for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Signal-To-Noise Ratio indicates how much the signal strength is stronger than the noise (co-channel interference). Signal must be stronger than noise (SNR greater than zero) for data transfer to be possible. If the signal is only barely stronger than noise, you may encounter occasional connection drop-offs.

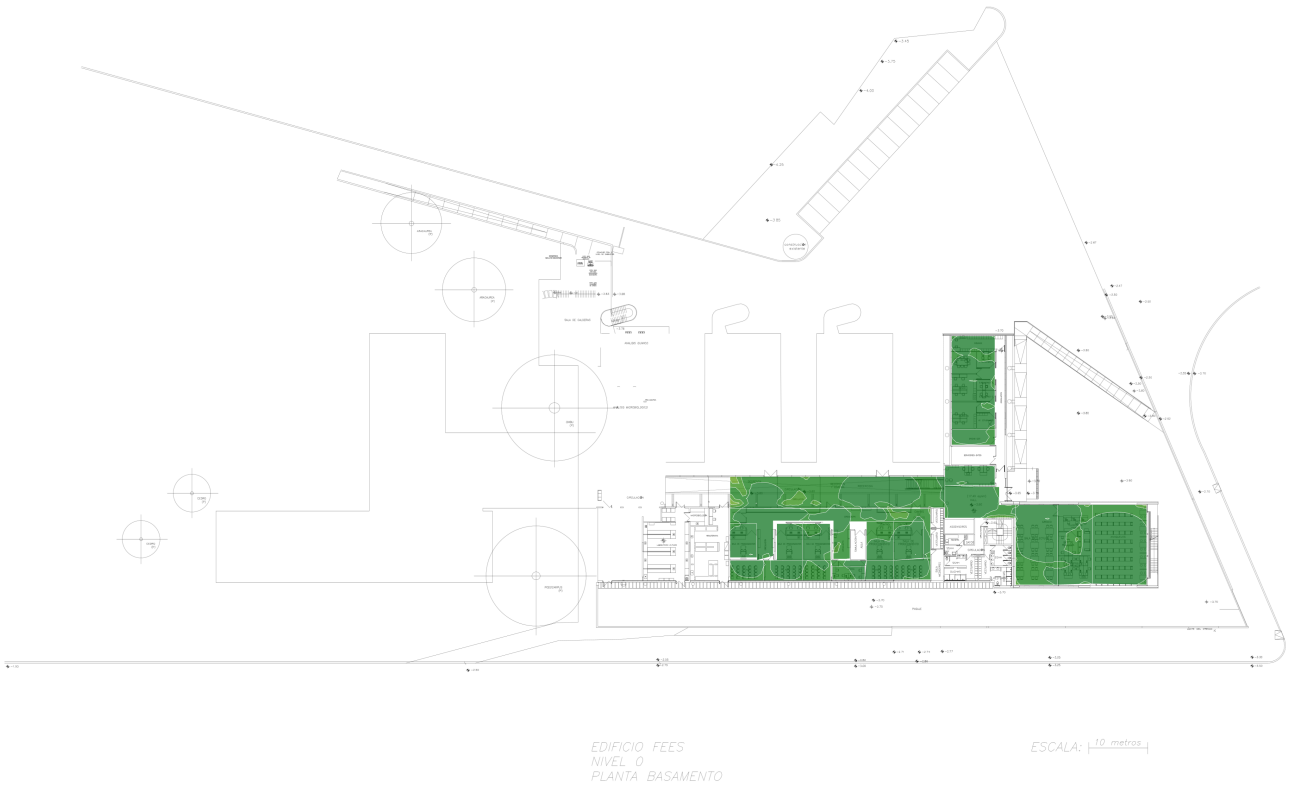

5 dB Ekahau Best Practices	25	≥ 40 dB
5 dB Basic Connectivity	16	≥ 40 dB

Channel Interference for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Channel interference indicates the number of access points overlapping at each location in a single channel.

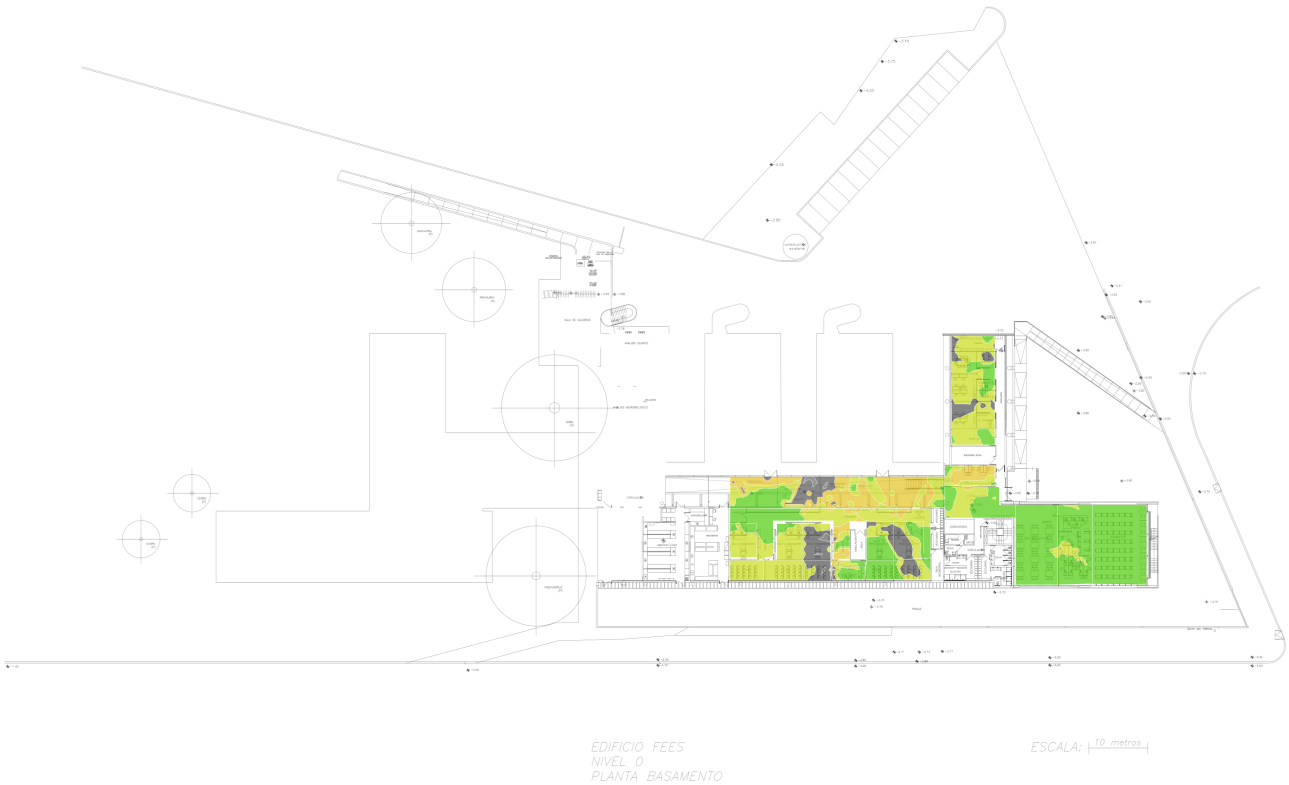

≤ 1 Basic Connectivity		3		≥ 6
≤ 1 Ekahau Best Practices	2			≥ 6

Channel Interference for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Channel interference indicates the number of access points overlapping at each location in a single channel.

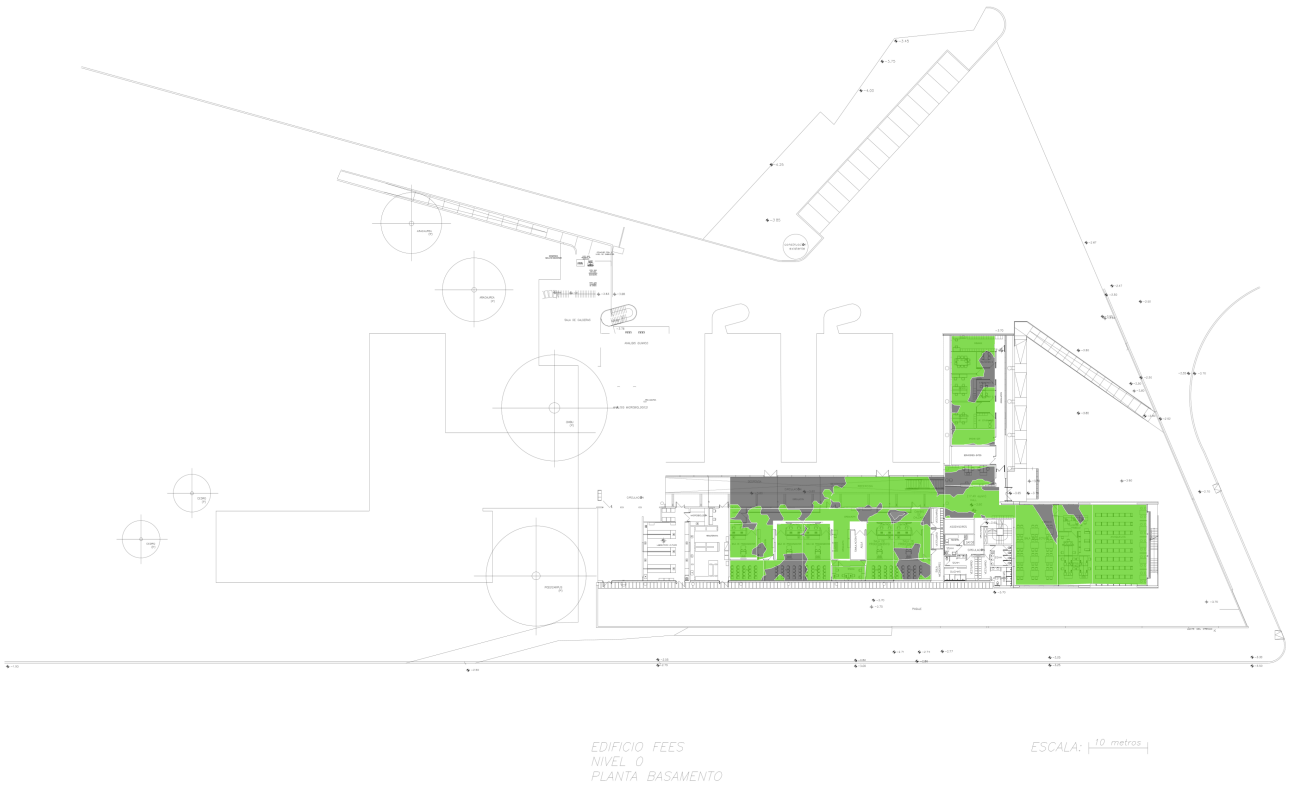

≤ 1	1				≥ 6

Number of APs for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Number of Access Points indicates the number of access points audible at each location.

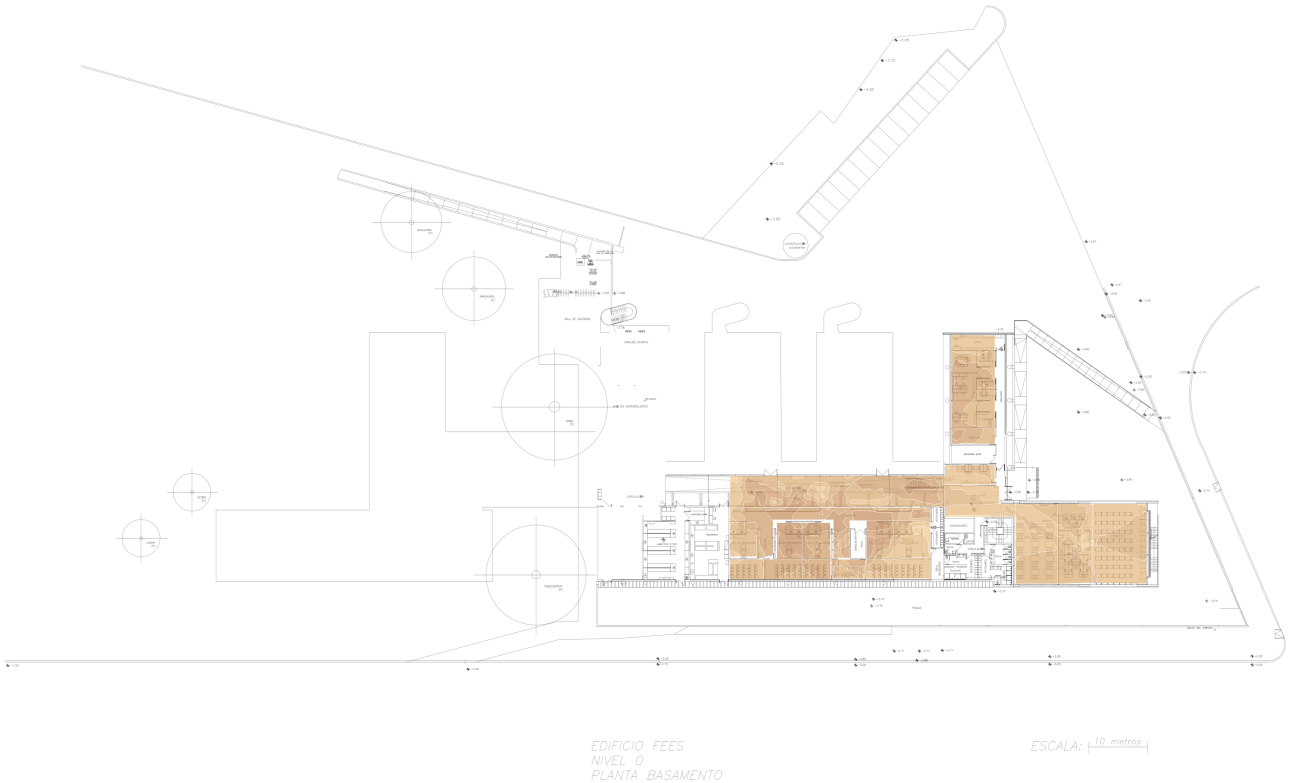

None ≥ 20


Number of APs for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band

Number of Access Points indicates the number of access points audible at each location.

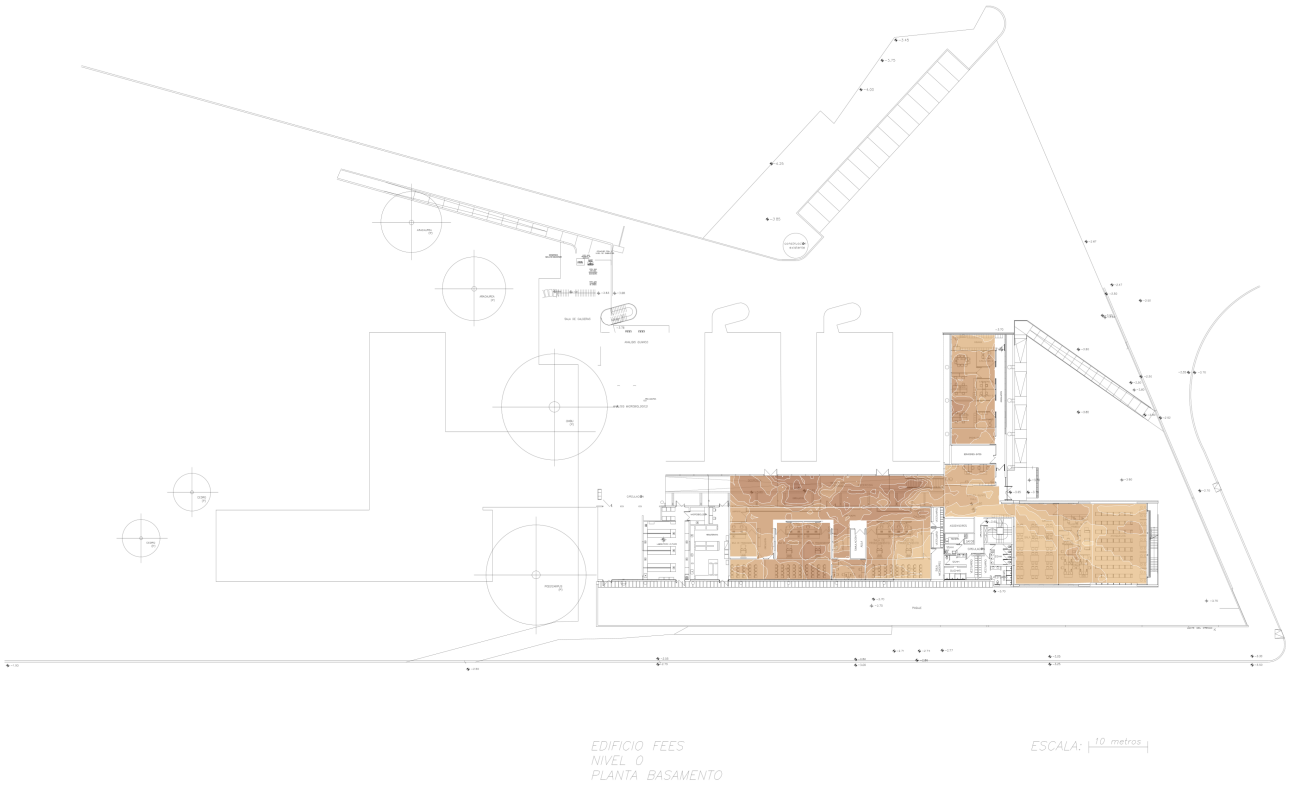

Noise for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Displays the calculated co-channel interference level.

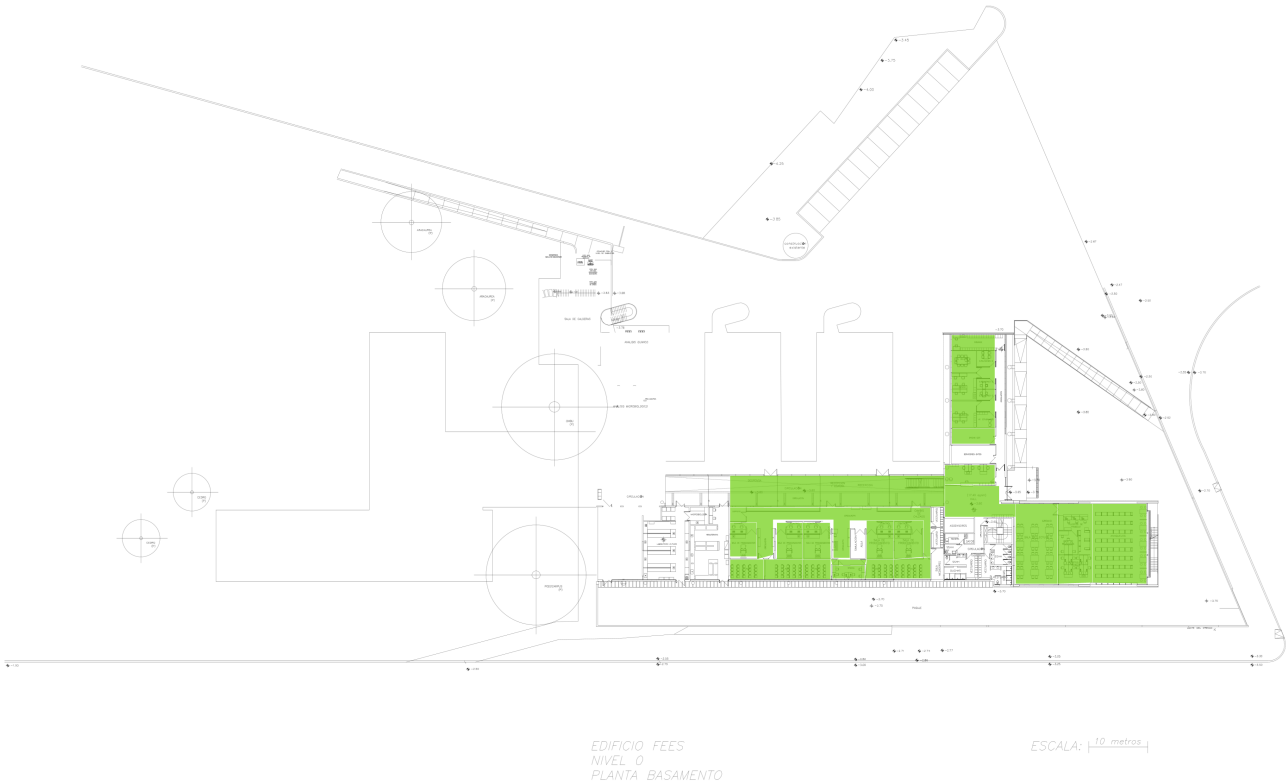



Noise for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Displays the calculated co-channel interference level.

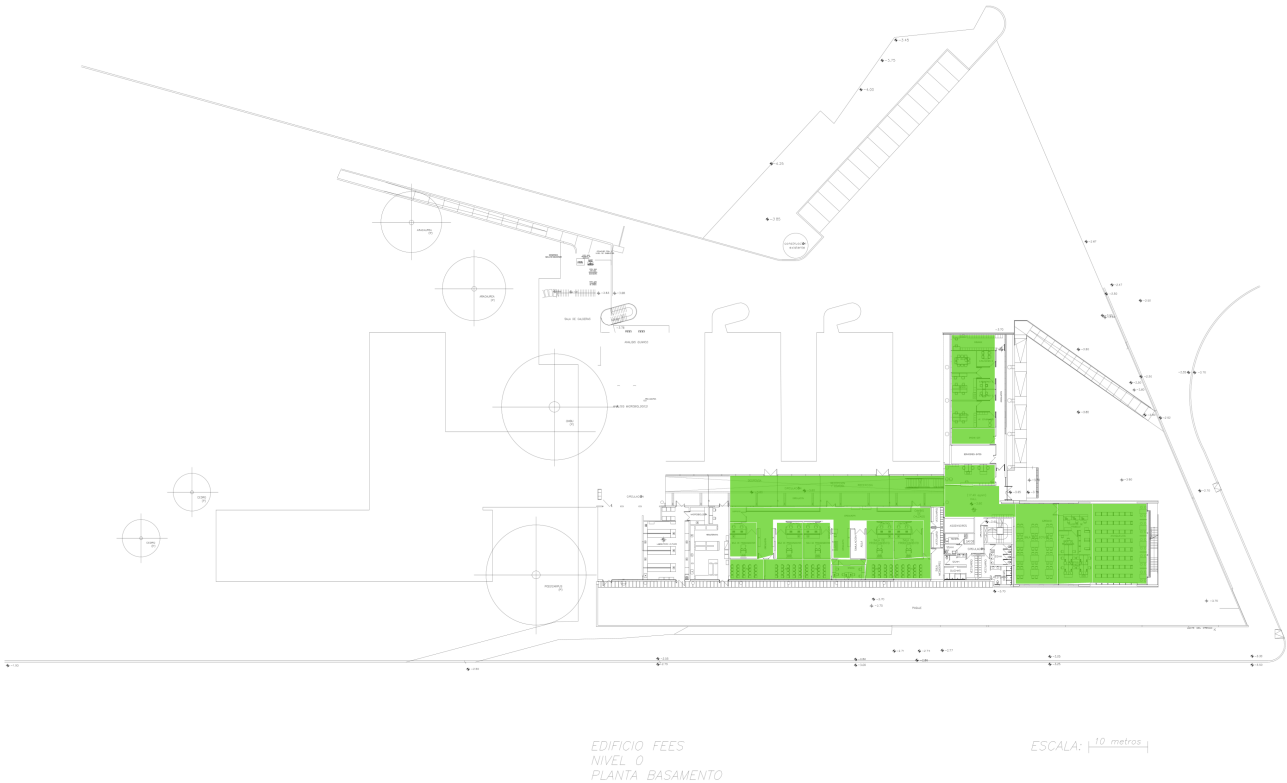



Data Rate for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Data Rate is the highest possible speed (measured in megabits per second) at which the wireless devices will be transmitting data. Typically the true data throughput is about half of the data rate or less.

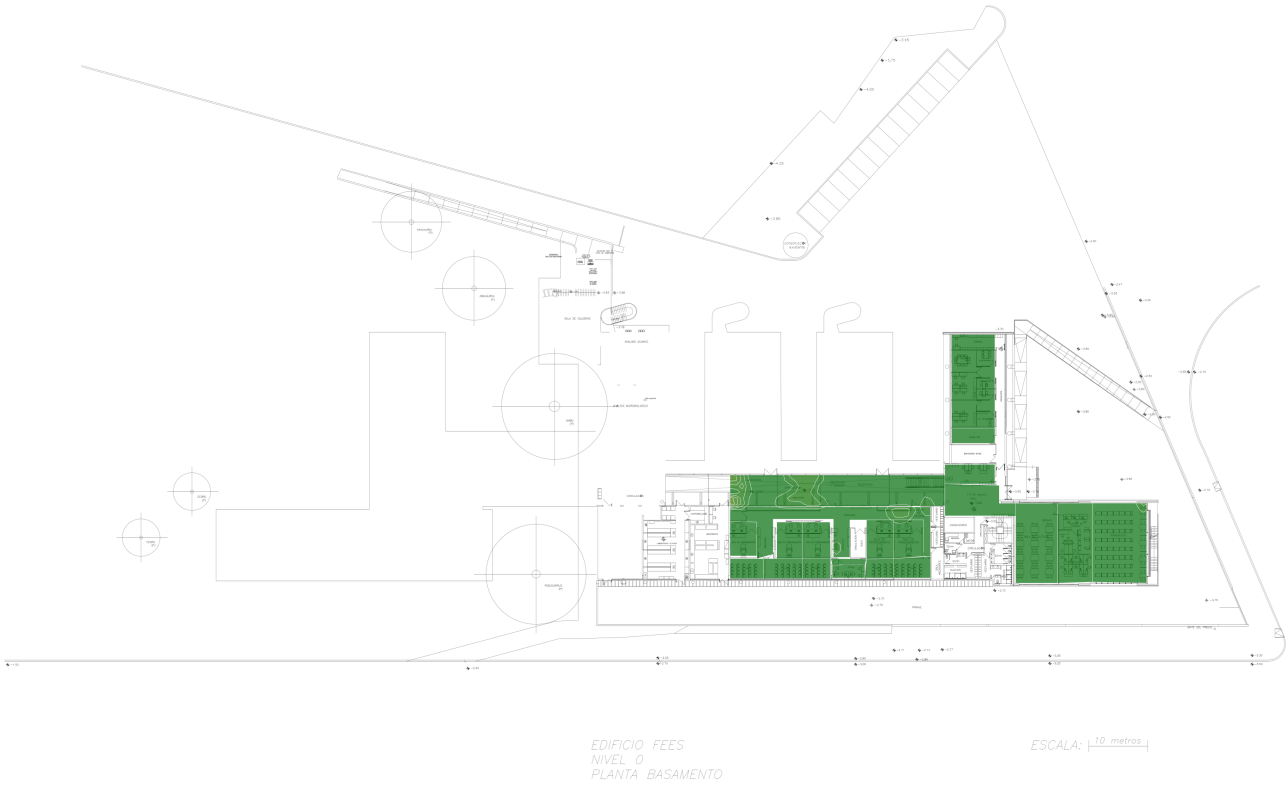



Data Rate for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Data Rate is the highest possible speed (measured in megabits per second) at which the wireless devices will be transmitting data. Typically the true data throughput is about half of the data rate or less.

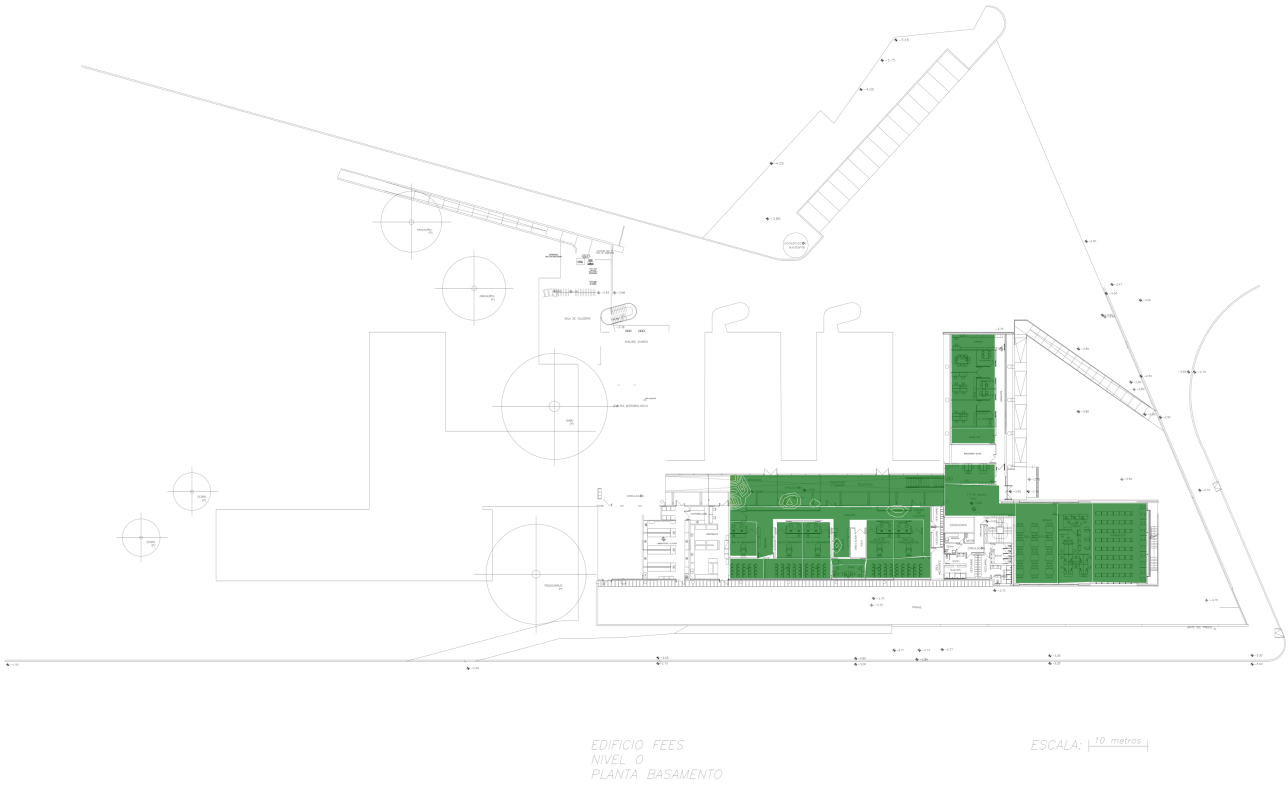



Throughput for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Displays the measured throughput. If no measured throughput is available, then the estimated maximum throughput is shown instead.

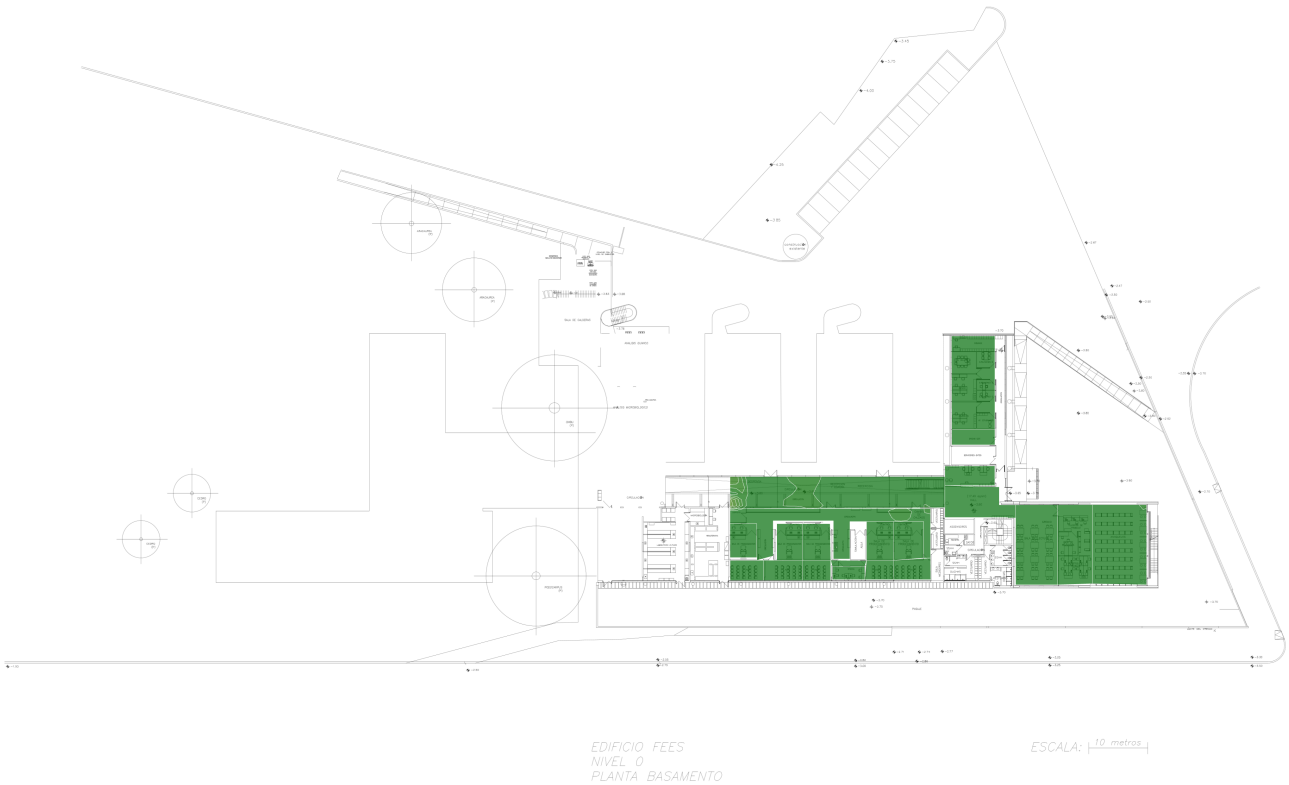



Throughput for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Displays the measured throughput. If no measured throughput is available, then the estimated maximum throughput is shown instead.

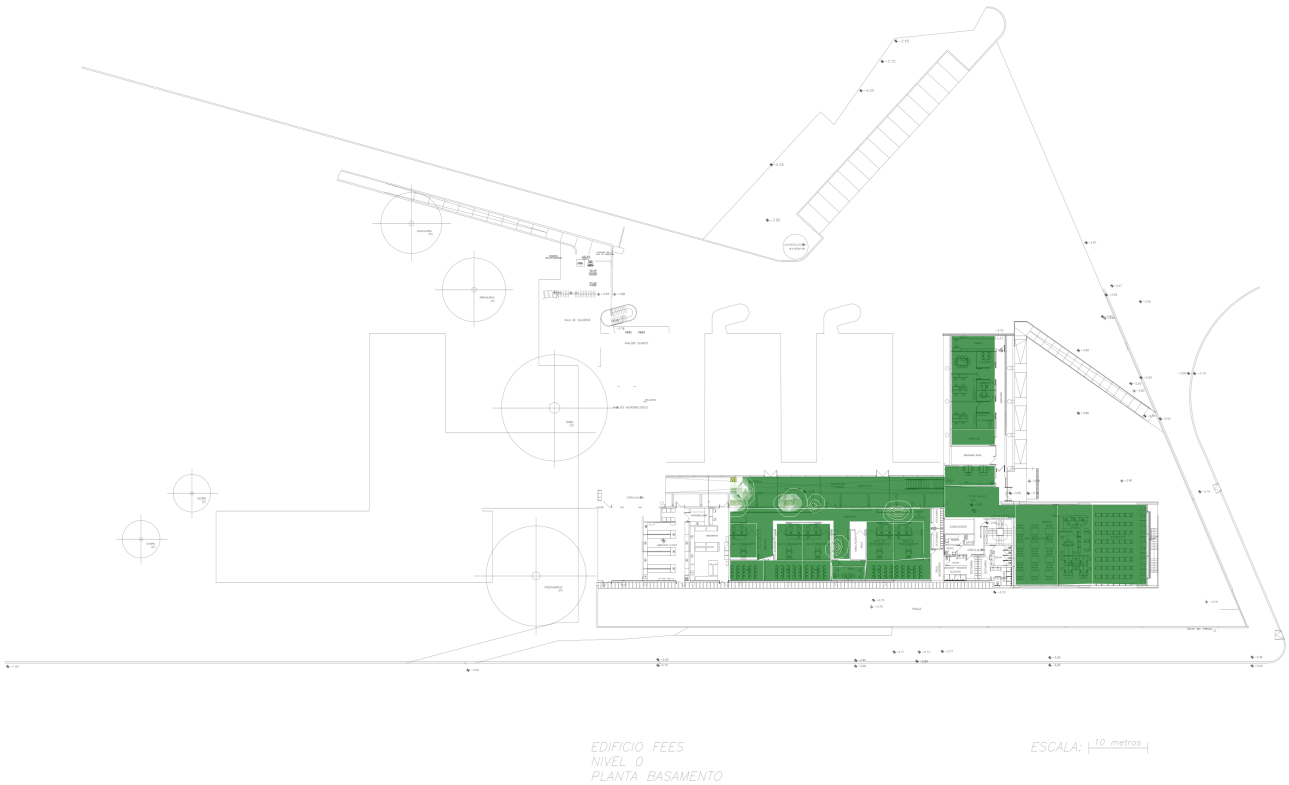



Associated Access Point for 2026 02 26 - FEES N0 Planta Basamento 2025

Displays the access point the client device is associated with.
The image shows Predicted Association - Signal Strength

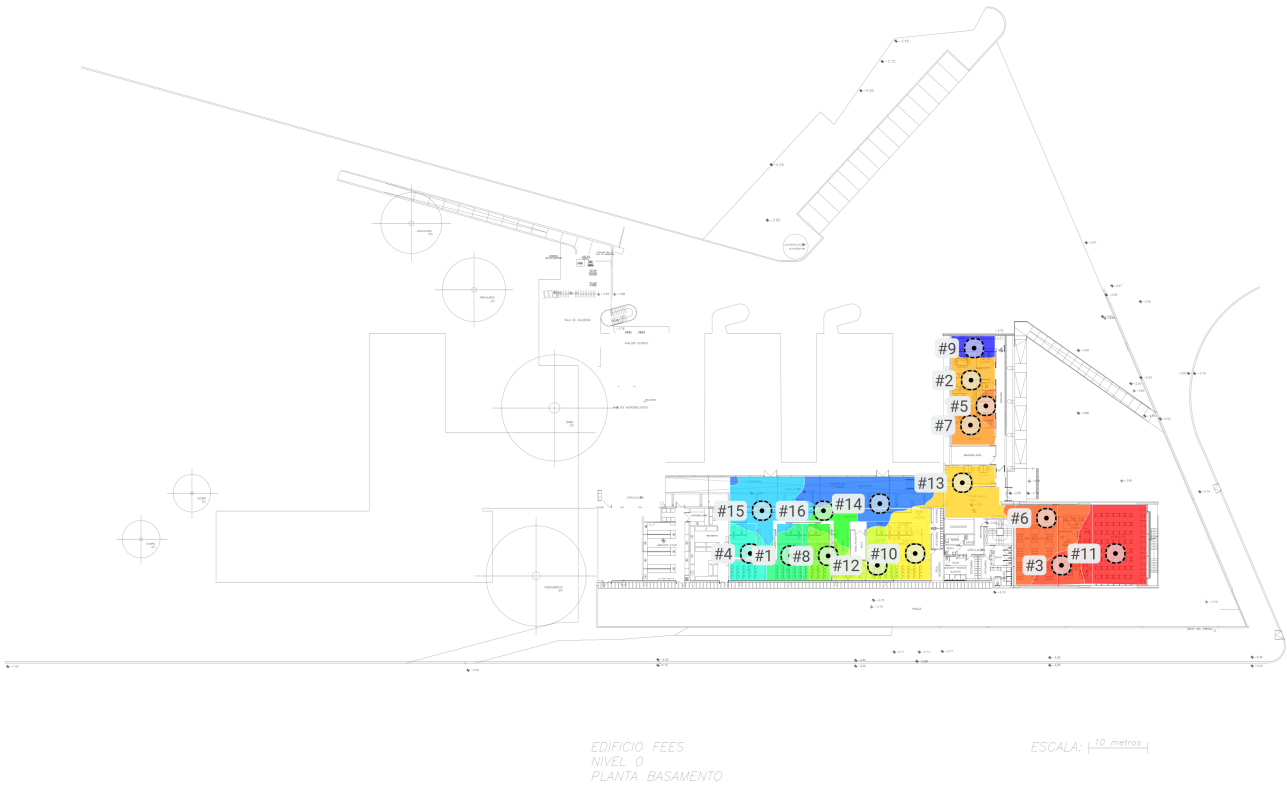


AP #	Access Point			
1	Simulated AP-1		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	44@40	25 mW	Generic 2.2dBi Omni

2	Simulated AP-10		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	52@40	25 mW	Generic 2.2dBi Omni
3	Simulated AP-11		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	157@40	25 mW	Generic 2.2dBi Omni
4	Simulated AP-12		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	36@40	25 mW	Generic 2.2dBi Omni
5	Simulated AP-13		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	149@40	25 mW	Generic 2.2dBi Omni
6	Simulated AP-14		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	52@40	25 mW	Generic 2.2dBi Omni
7	Simulated AP-15		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	44@40	25 mW	Generic 2.2dBi Omni
8	Simulated AP-16		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	149@40	25 mW	Generic 2.2dBi Omni
9	Simulated AP-2		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	157@40	25 mW	Generic 2.2dBi Omni
10	Simulated AP-3		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	44@40	25 mW	Generic 2.2dBi Omni
11	Simulated AP-4		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	36@40	25 mW	Generic 2.2dBi Omni
12	Simulated AP-5		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	52@40	25 mW	Generic 2.2dBi Omni

13	Simulated AP-6		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	60@40	25 mW	Generic 2.2dBi Omni
14	Simulated AP-7		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	36@40	25 mW	Generic 2.2dBi Omni
15	Simulated AP-8		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	60@40	25 mW	Generic 2.2dBi Omni
16	Simulated AP-9		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	157@40	25 mW	Generic 2.2dBi Omni

Network Health for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Wi-Fi is typically built for a certain purpose or several purposes, such as VoIP, web browsing, or location tracking. With Network Health, you can, with a single visualization, display whether the network meets your requirements or not.

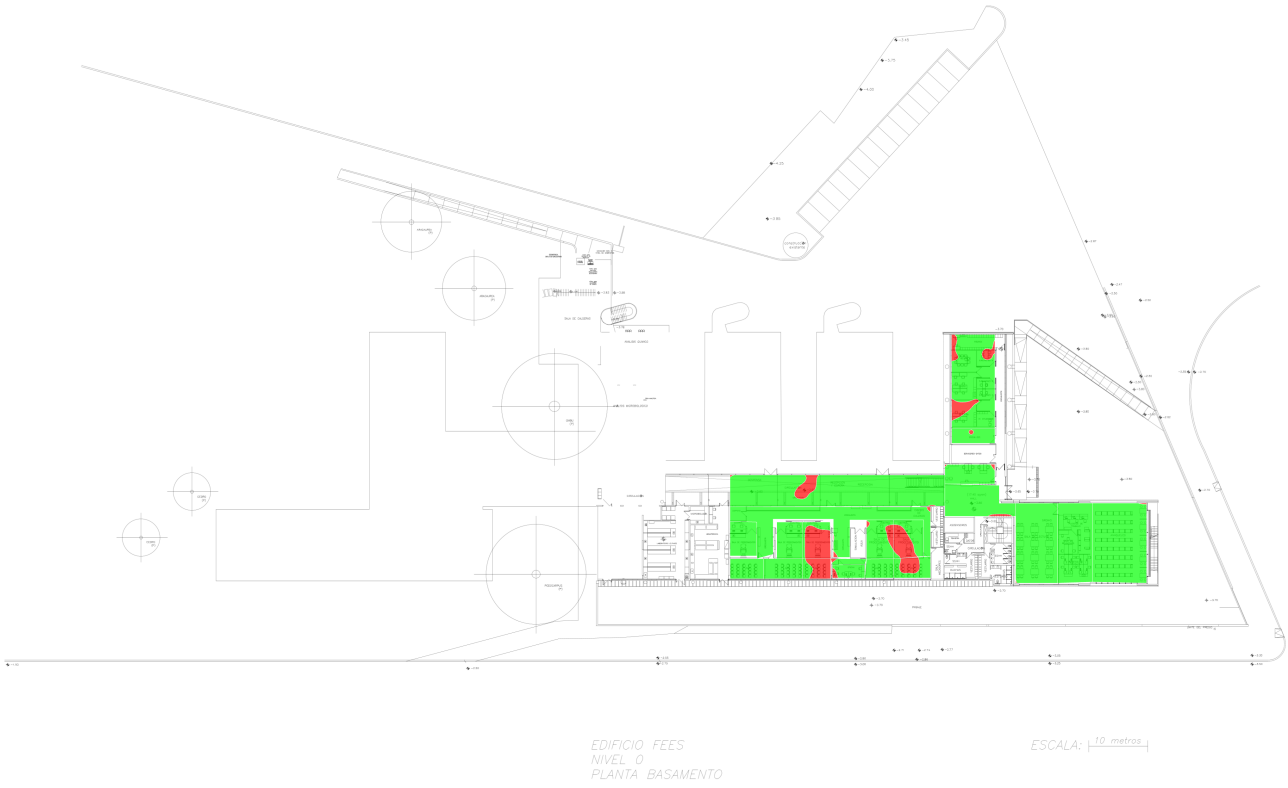

Fail	Pass

Network Health for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Wi-Fi is typically built for a certain purpose or several purposes, such as VoIP, web browsing, or location tracking. With Network Health, you can, with a single visualization, display whether the network meets your requirements or not.

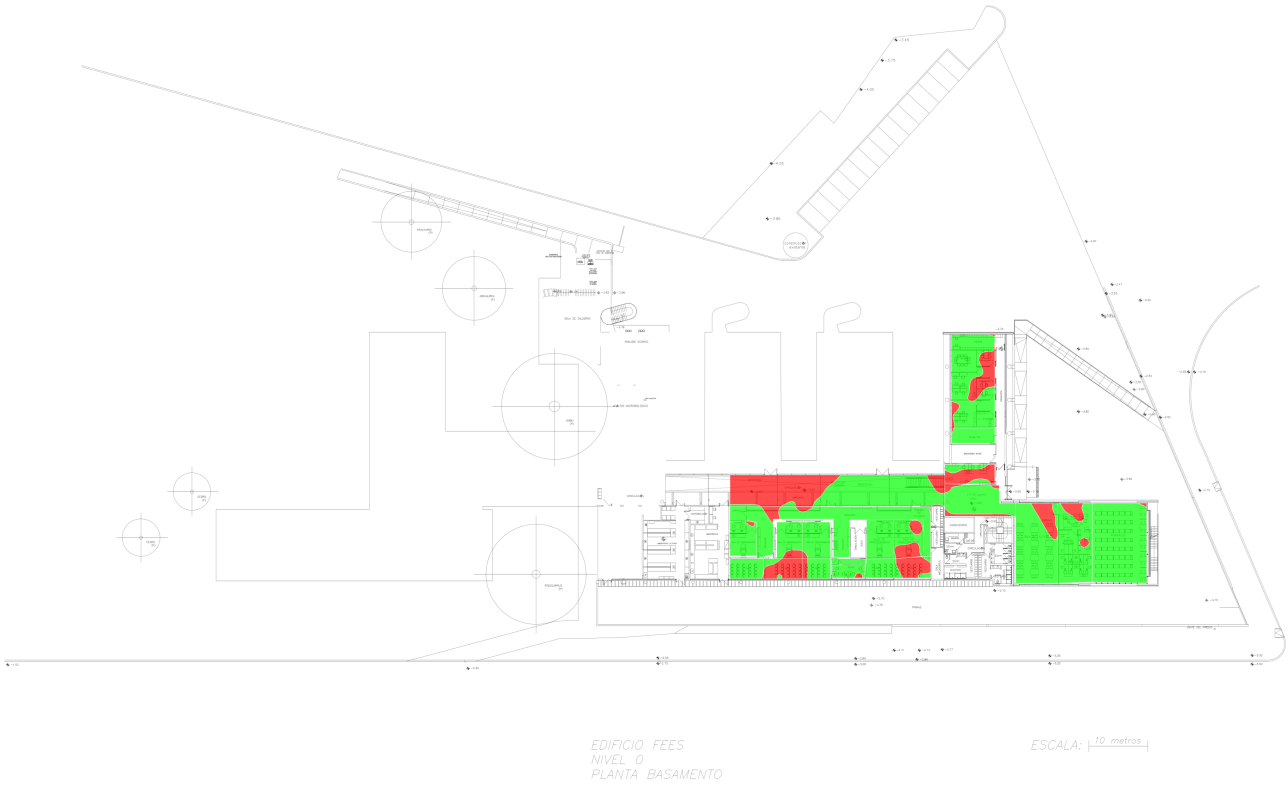

Fail	Pass

Network Issues for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Network Issues complements Network Health by showing the requirement that is below the threshold level at each location. Whereas Network Health answers the question "Does it work?", Network Issues answers the question "If it doesn't work, why?".

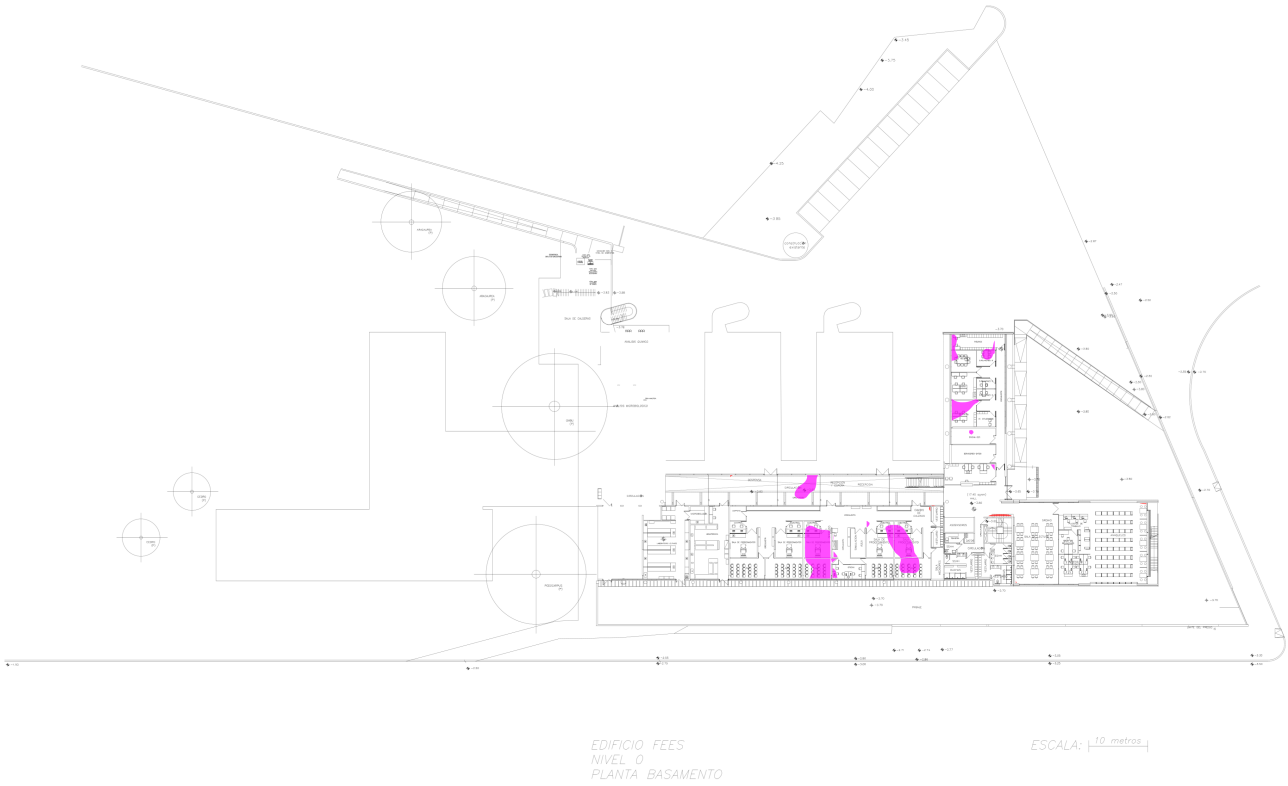

1st STR	2nd STR	Ch. INT

Network Issues for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Network Issues complements Network Health by showing the requirement that is below the threshold level at each location. Whereas Network Health answers the question "Does it work?", Network Issues answers the question "If it doesn't work, why?".

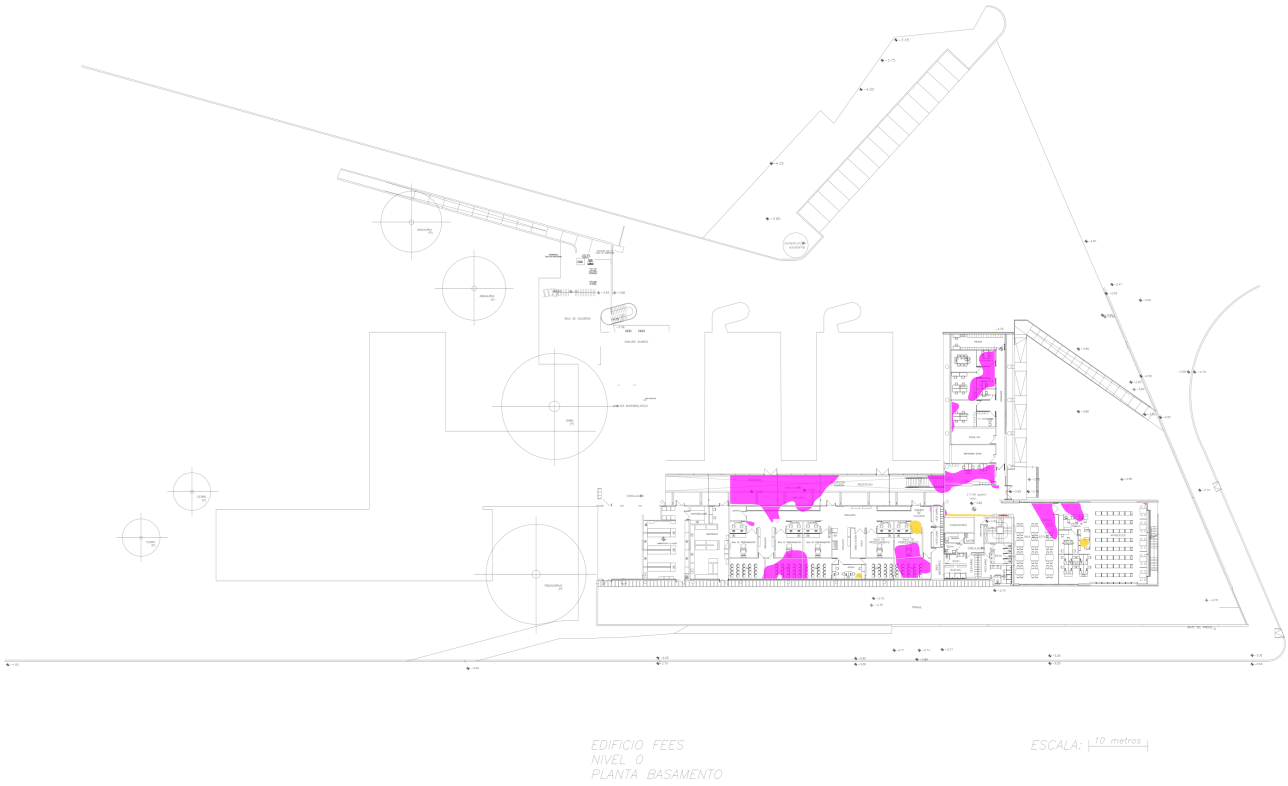

1st STR	2nd STR	Ch. INT


Airtime Utilization for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band

Shows the utilization of the total available air time

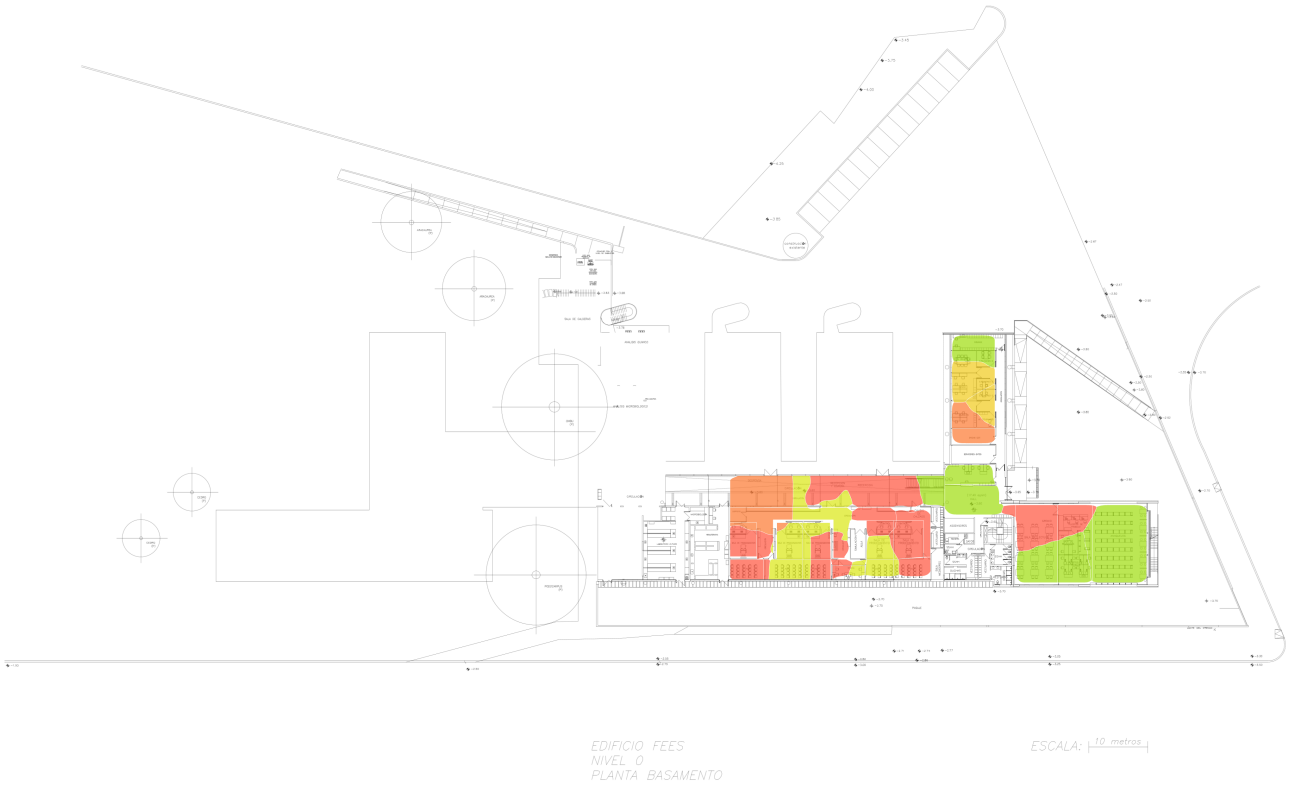

Airtime Utilization for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Shows the utilization of the total available air time

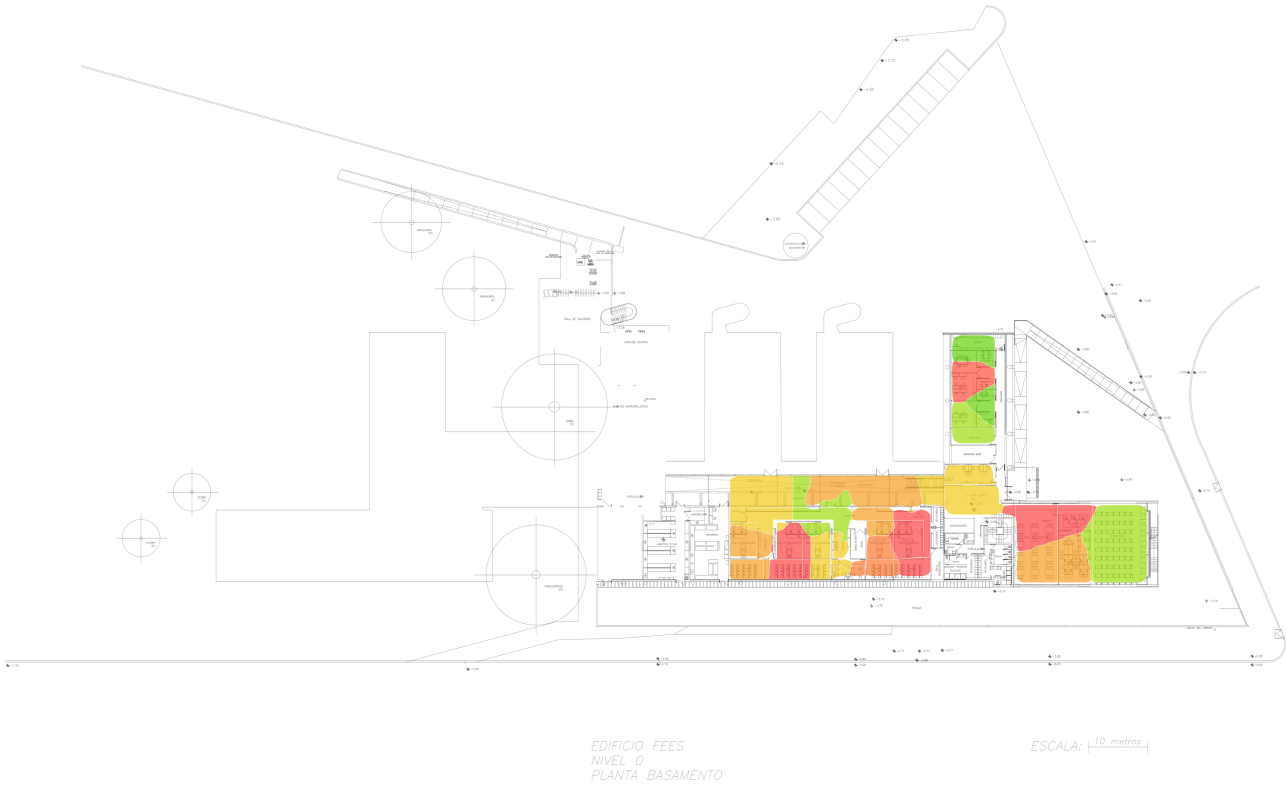



Capacity: Clients per AP for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Shows how the Wi-Fi clients configured in your Capacity Requirement are distributed between the access points. The image shows Requested Associations

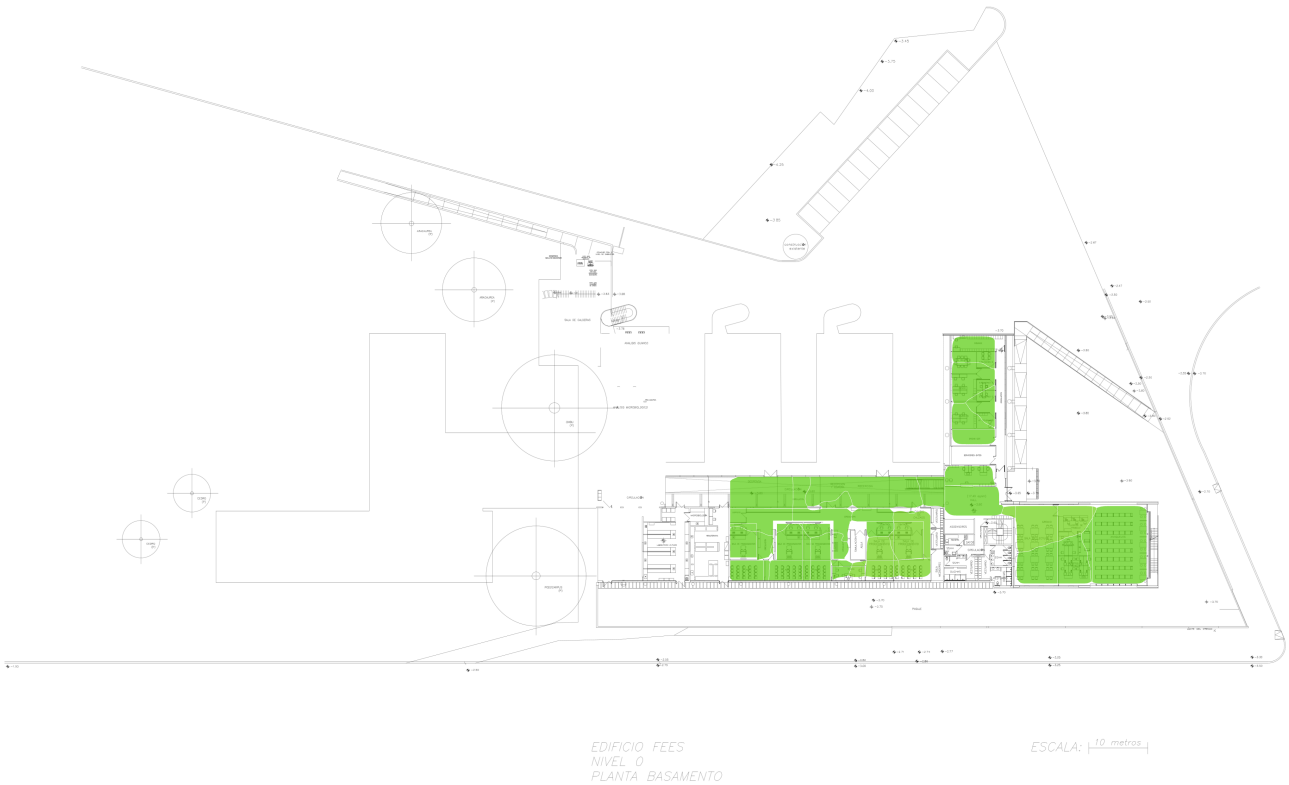



Capacity: Clients per AP for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band


Shows how the Wi-Fi clients configured in your Capacity Requirement are distributed between the access points. The image shows Requested Associations

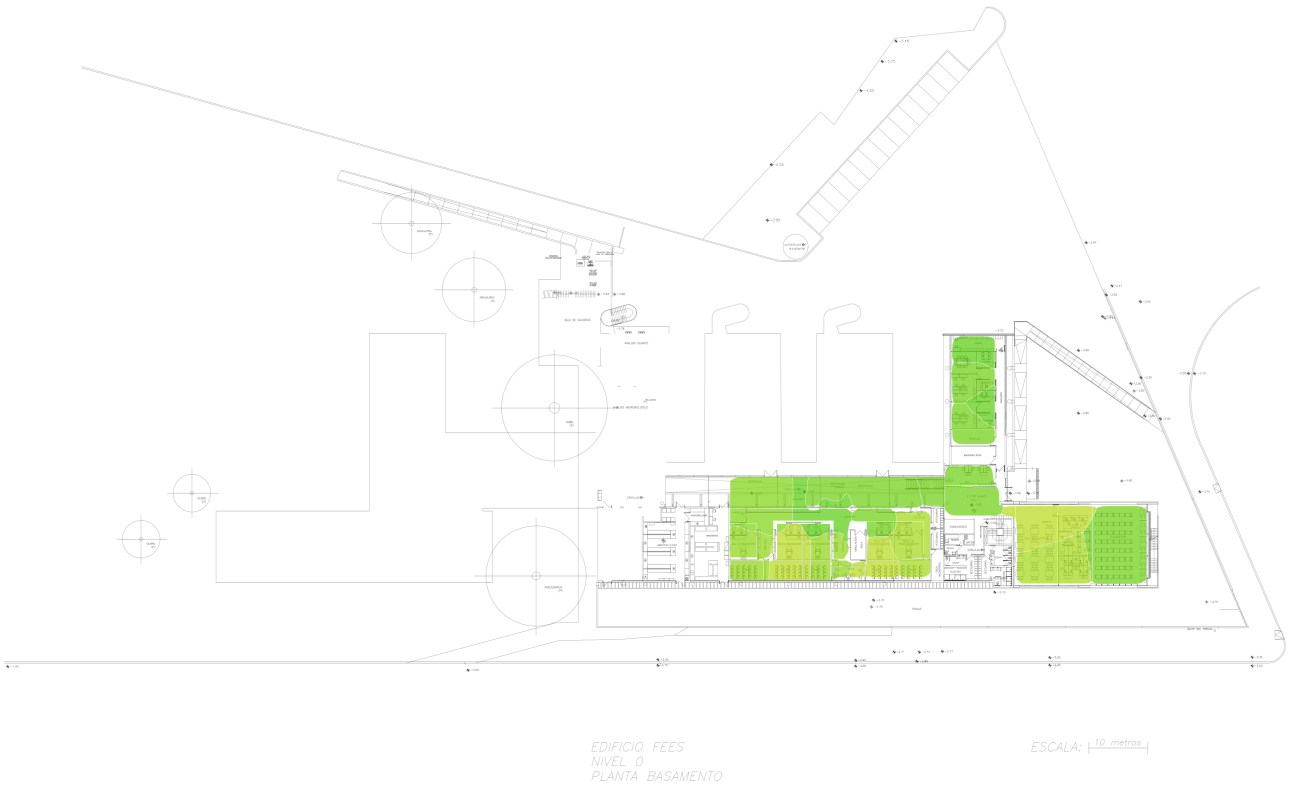



Capacity Health for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Capacity Health displays if the network can handle the load of the configured Wi-Fi clients

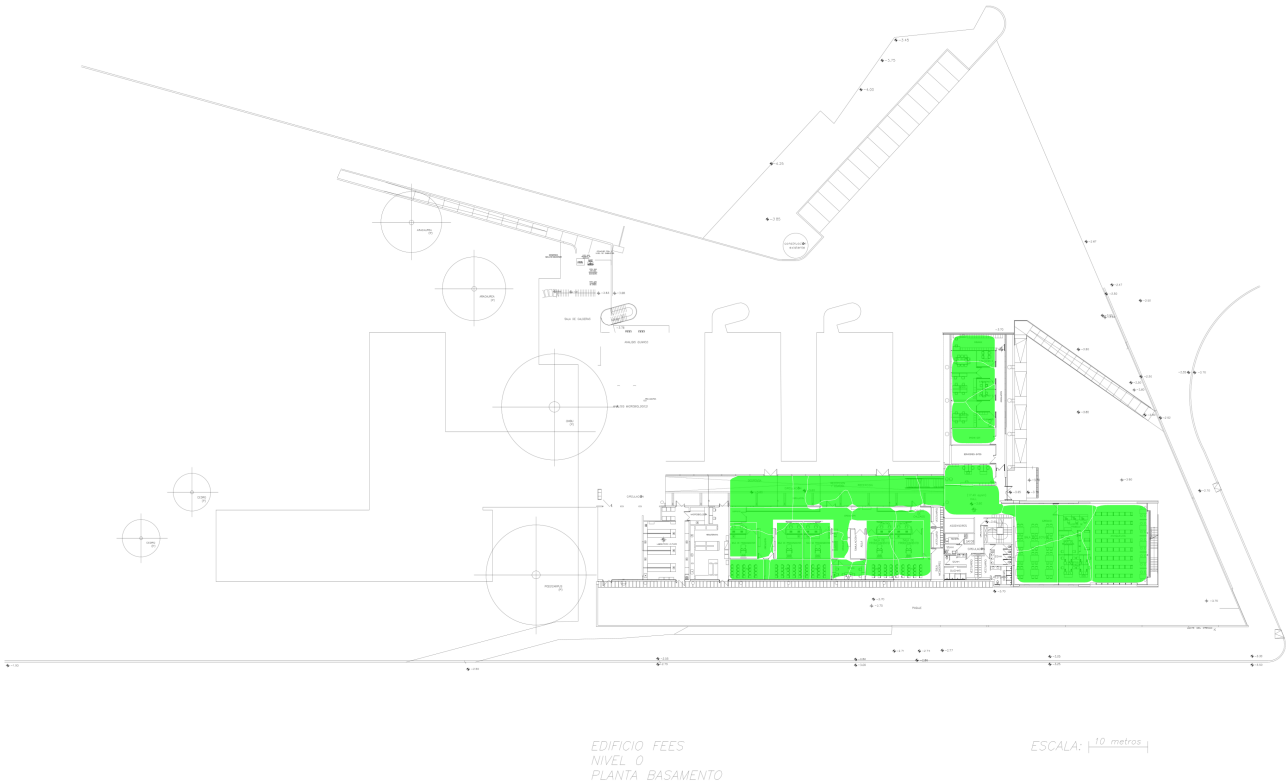

Pass	Airtime	Clients


Capacity Health for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band

Capacity Health displays if the network can handle the load of the configured Wi-Fi clients

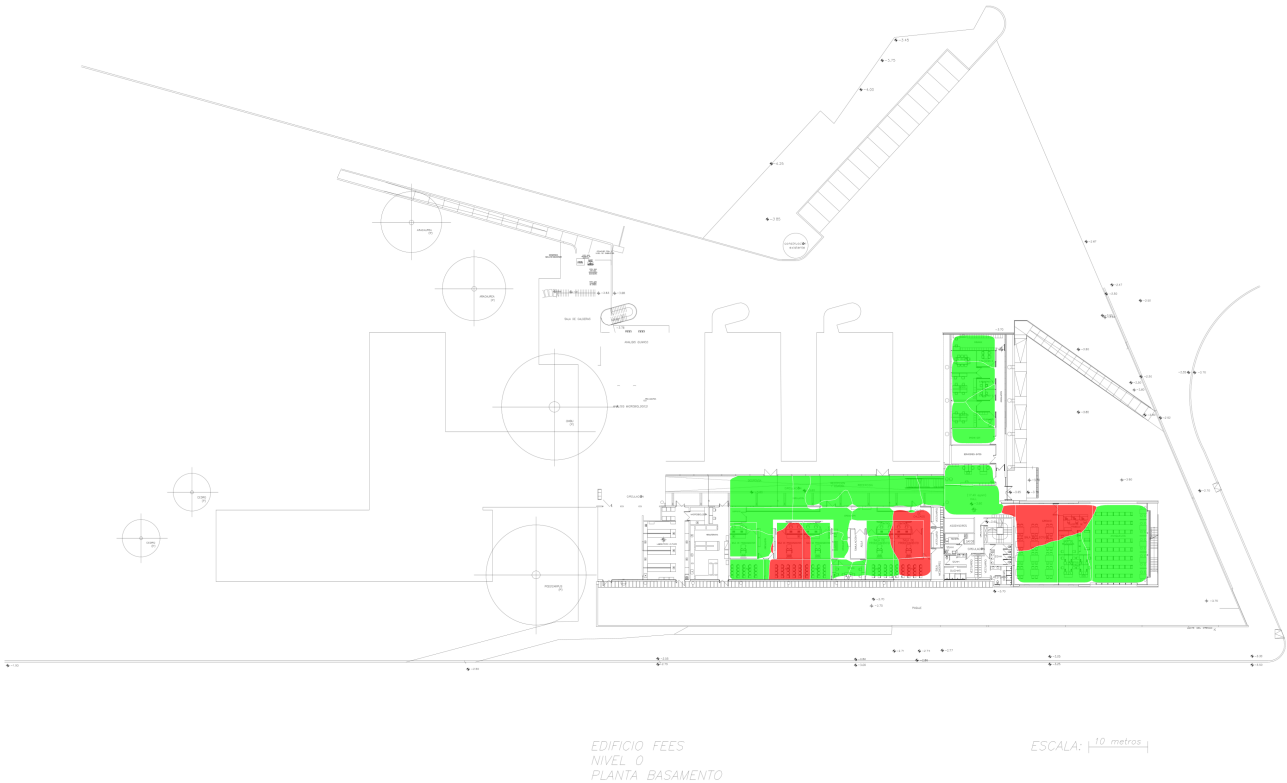

Pass	Airtime	Clients

Access Points on 2026 02 26 - FEES N0 Planta Basamento 2025

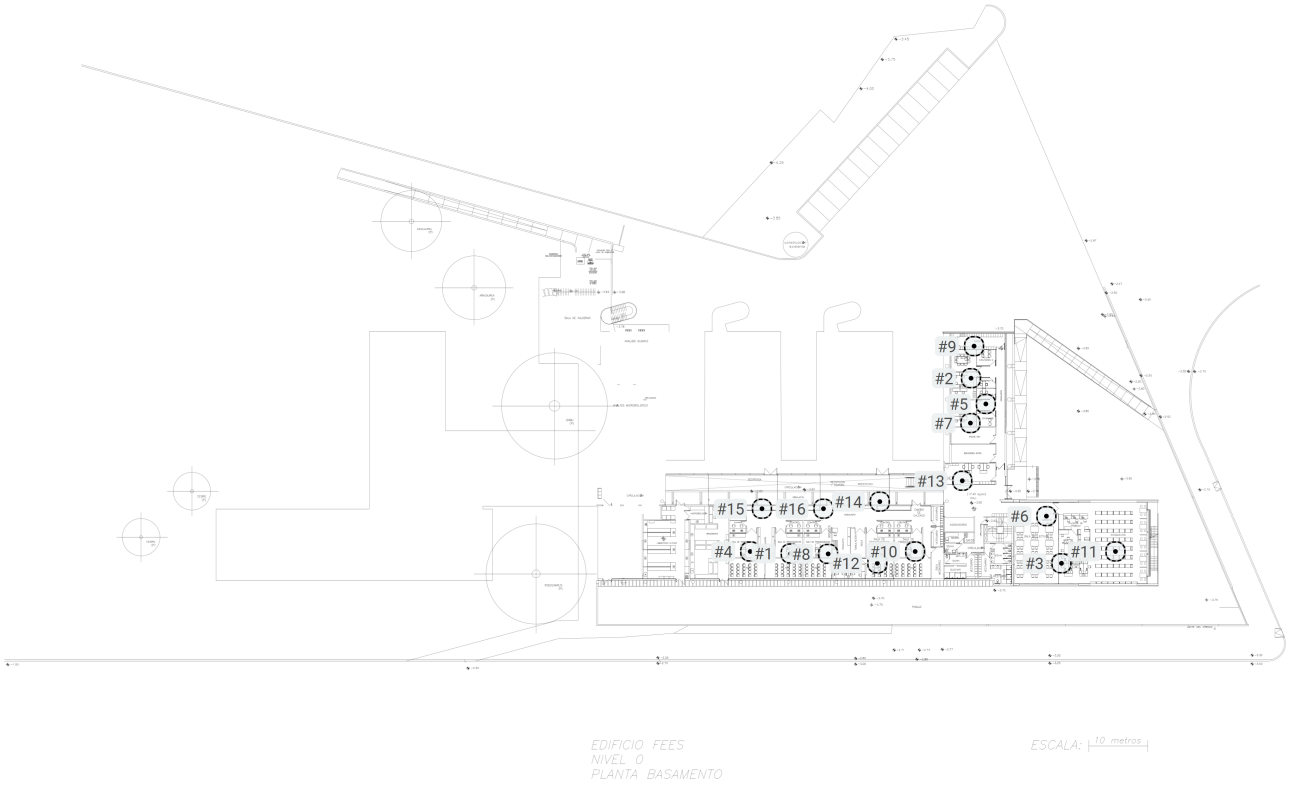

My Access Points on 2026 02 26 - FEES N0 Planta Basamento 2025

Simulated Access Points on 2026 02 26 - FEES N0 Planta Basamento 2025

AP #	Access Point			
1	Simulated AP-1		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	44@40	25 mW	Generic 2.2dBi Omni
2	Simulated AP-10		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	52@40	25 mW	Generic 2.2dBi Omni
3	Simulated AP-11		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	157@40	25 mW	Generic 2.2dBi Omni
4	Simulated AP-12		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	36@40	25 mW	Generic 2.2dBi Omni
5	Simulated AP-13		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	149@40	25 mW	Generic 2.2dBi Omni
6	Simulated AP-14		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	52@40	25 mW	Generic 2.2dBi Omni
7	Simulated AP-15		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	44@40	25 mW	Generic 2.2dBi Omni
8	Simulated AP-16		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	149@40	25 mW	Generic 2.2dBi Omni
9	Simulated AP-2		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	157@40	25 mW	Generic 2.2dBi Omni
10	Simulated AP-3		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	44@40	25 mW	Generic 2.2dBi Omni
11	Simulated AP-4		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	36@40	25 mW	Generic 2.2dBi Omni
12	Simulated AP-5		Generic Wi-Fi 4/5 Dual Radio	

	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	52@40	25 mW	Generic 2.2dBi Omni
13	Simulated AP-6		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	60@40	25 mW	Generic 2.2dBi Omni
14	Simulated AP-7		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	1	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	36@40	25 mW	Generic 2.2dBi Omni
15	Simulated AP-8		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	11	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	60@40	25 mW	Generic 2.2dBi Omni
16	Simulated AP-9		Generic Wi-Fi 4/5 Dual Radio	
	Wi-Fi 4	6	6 mW	Generic 2.2dBi Omni
	Wi-Fi 5	157@40	25 mW	Generic 2.2dBi Omni

Measured Access Points on 2026 02 26 - FEES N0 Planta Basamento 2025

None.

Other Access Points on 2026 02 26 - FEES N0 Planta Basamento 2025

Simulated Access Points on 2026 02 26 - FEES N0 Planta Basamento 2025


None.

Measured Access Points on 2026 02 26 - FEES N0 Planta Basamento 2025

None.

Channel Width for 2026 02 26 - FEES N0 Planta Basamento 2025 on 2.4 GHz band


Shows the maximum channel width available in each area.

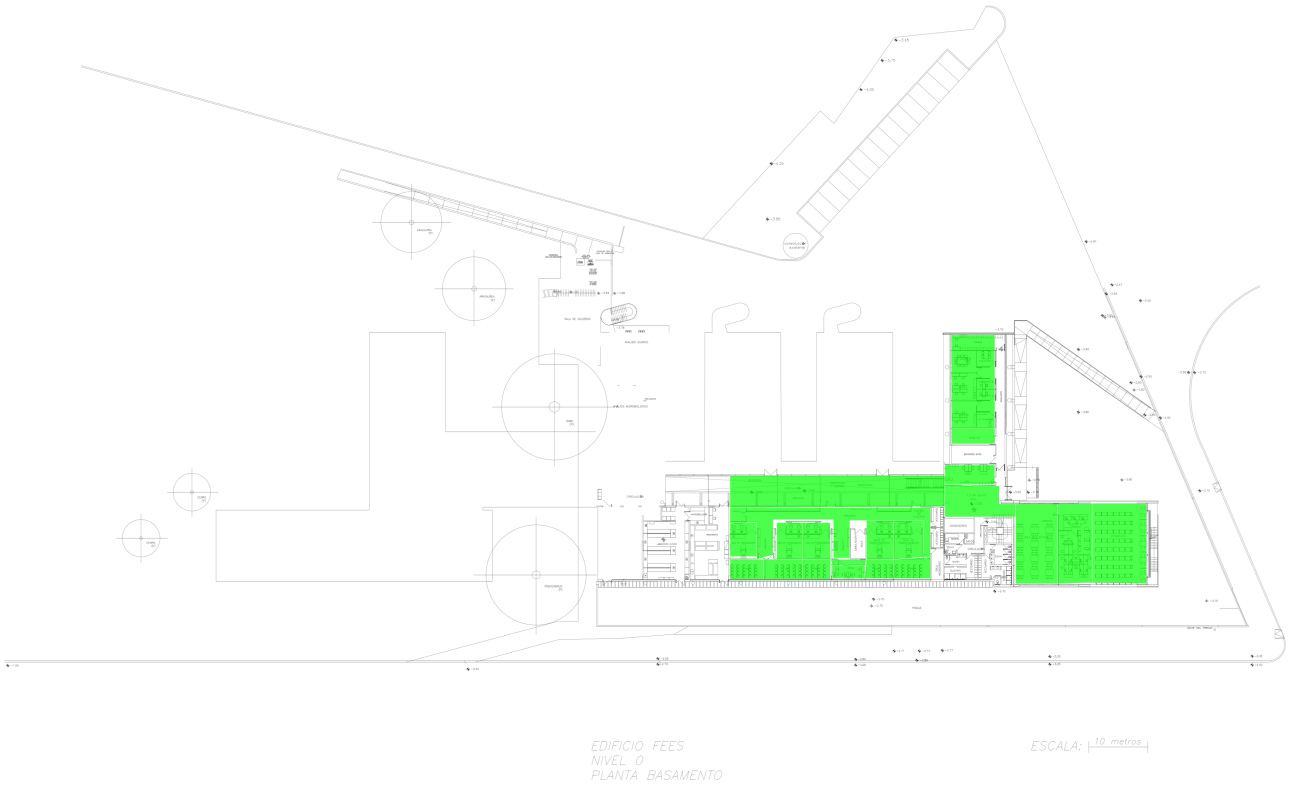

20MHz	40MHz	80MHz	160MHz

Channel Width for 2026 02 26 - FEES N0 Planta Basamento 2025 on 5 GHz band

Shows the maximum channel width available in each area.

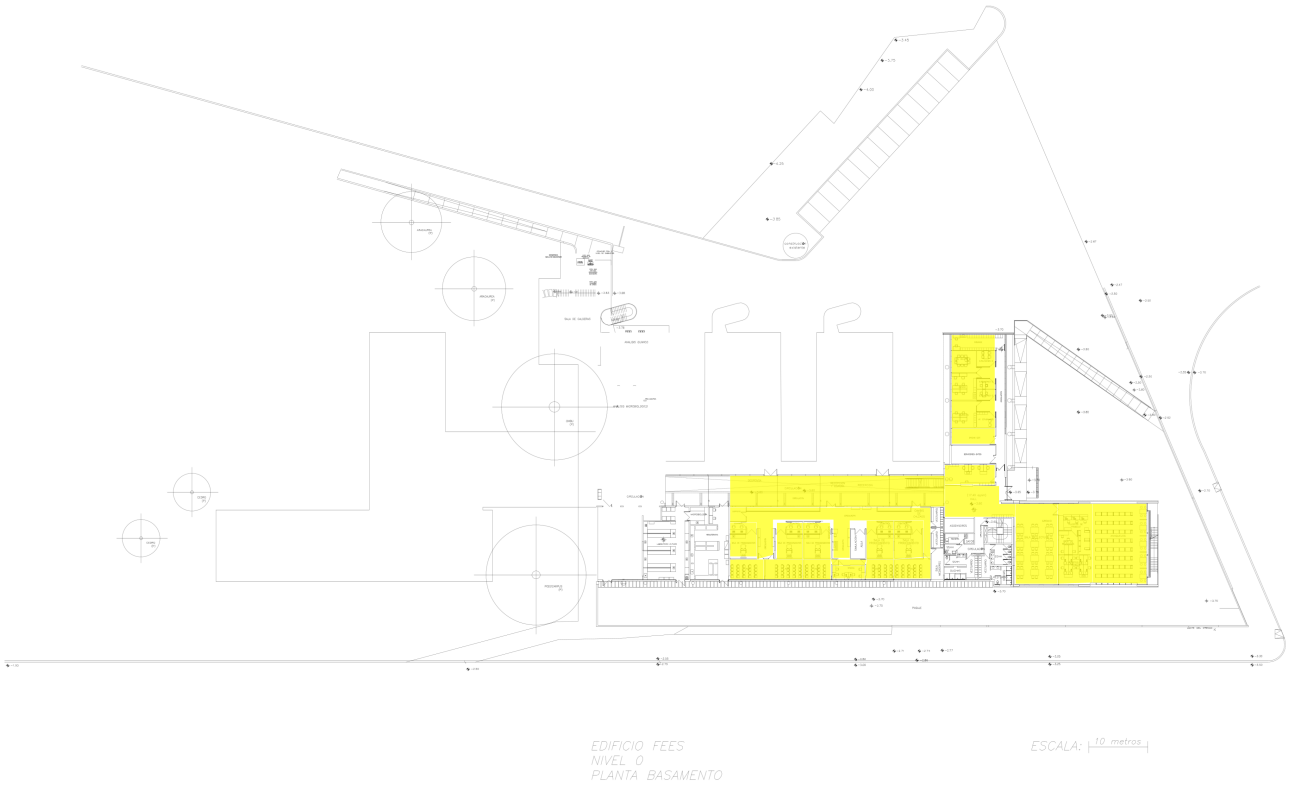

20MHz	40MHz	80MHz	160MHz

Measured Access Points not placed on any map

My Access Points not placed on any map

None.

Other Access Points not placed on any map

None.

Network capacity configuration

	2.4 GHz	5 GHz	6 GHz
Minimum Data Rate	**12 Mbits/s**	**12 Mbits/s**	**12 Mbits/s**
Number of SSIDs	**2**	**2**	**2**
Max. Associated Clients	**200**	**200**	**200**
RTS / CTS	**No**	**No**	**No**